

SAFETY PRECAUTIONS

1. Make sure incoming pressure does not exceed the rated pressure.
2. Use proper eye protection when assembling and using the hose reel.
3. Assemble the hose reel on a clean workbench free of debris and moisture.
4. Use soap and water when checking for air leaks.
5. Keep children away from work area.

WARNING:

Exposure of skin directly to pressurized air or fluids could result in severe bodily injury!



HOSE REELS

FROM GENERAL PUMP

D30001 (AS SHOWN)

D30002 (AS SHOWN)

D30004 (W/PIGTAIL)

D30006 (W/PIGTAIL)

- DIRECT HAND-CRANK REWIND WITH LOCKING MECHANISM
- SOLID STEEL CONSTRUCTION
- DURABLE POWDERCOAT FINISH
- FULL FLOW SWIVEL BRASS JOINT

OPERATOR'S MANUAL


General Pump
1174 Northland Drive • Mendota Heights, MN 55120
Phone: 651.686.2199 • Fax: 800.535.1745
www.generalpump.com email: sales@gpcompanies.com

Ref 300638 Rev. A
08-07



ASSEMBLY AND OPERATING INSTRUCTIONS

- 1. Connect the handle to the flange. Nuts go on handle side of flange.
- 2. Use (4) 3/8” or 10 mm bolts when securing the hose reel to ceiling or wall.
- 3. Use the provided nuts, bolts, and mounting bracket when securing hose reel to a cart.
- 4. Use thread sealant (not provided) on inlet threads and on outlet hose (not provided).
- 5. The hose reel is ready for operation.

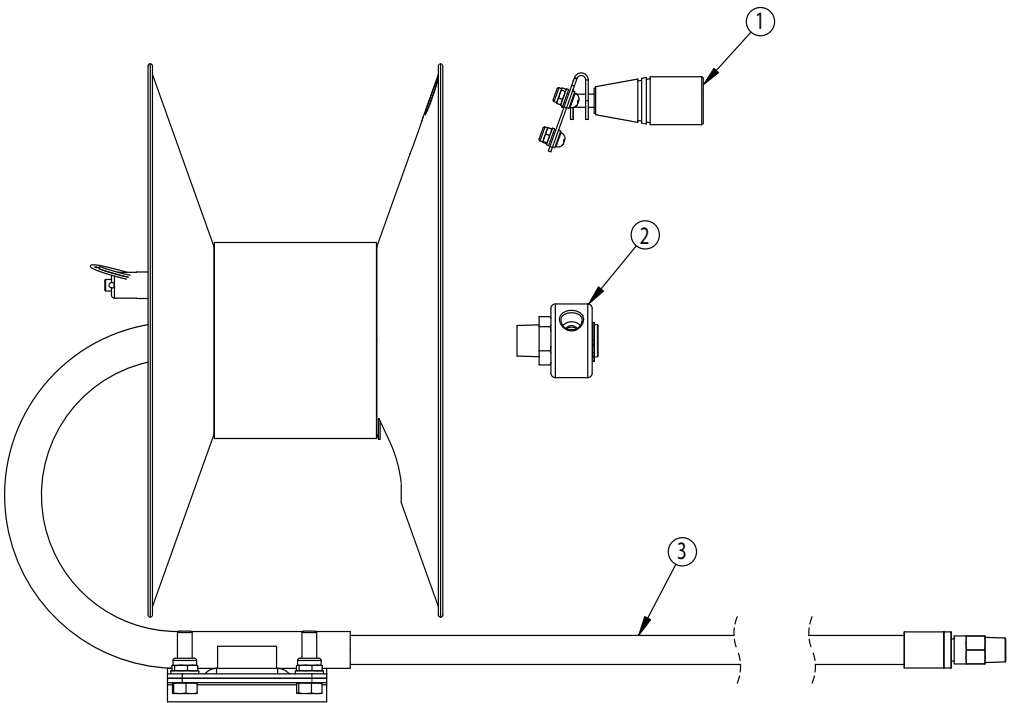

SPECIFICATIONS

Model	3/8 Capacity	Pressure	Inlet	Outlet
D30001	50’	3500	3/8 NPT-M	3/8 NPT-F
D30002	100’	3500		
D30004	150’	3500		
D30006	200’	3500		

MAXIMUM TEMPERATURE RATING: 225⁰ F

PARTS LIST

	Item		
	1	2	3
D30001	100055	100887	N/A
D30002	100055	100887	NA
D30004	100056	100053	D30003
D30006	100056	100053	D30003
100888	Repair kit for 100887 and 100053		