



DKA

**20
TON**

DKA

SEPTEMBER 2023

**PRODUCT
CATALOG**



CURRAHEE TRAILERS SHOWN INSIDE!

www.dk2.com • 1 (888) 277-6960



DK2 has always forged our own path, creating new ways for the professionals or do-it-yourselfers to get more done for over 3 generations and counting.

We've grown into an industry leader with 5 unique product lines and hundreds of items distributed all over North America. Our business is ever-changing, but our purpose has remained the same – to deliver an exceptional customer experience and bring innovative high-quality and dependable products to all the hard workers that need them.



OPC513

DRA-POWER

KOHLER



DRA POWER

3-INCH 6.5 HP 196 CC DISK CHIPPER SHREDDER

ITEM NUMBER

OPC513

UPC

827518009123

FEATURES

- Powered by a KOHLER® 2000 Series RH265 6.5 HP 196 cc engine **1**
- Direct drive combo chipper shredder with double edge chip and hammer shredders
- Perfect for trees up to 3" (7.6 cm) in diameter, and twigs, leaves and garden composting up to 3/8" (0.95 cm) in diameter
- Includes a chip bag capable of holding up to 4.3 bushels
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 4.10/3.50-4 Ø10.2" (Ø26 cm) OD x 3.9" (10 cm) tires **4**
- Hitch-pin towing capability
- Includes 2-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

DESCRIPTION

Experience the power and efficiency of OPC513, a robust chipper shredder designed to effortlessly handle tough yard tasks. Equipped with the high-performance KOHLER® 2000 Series RH265 engine, it effortlessly deteriorates trees up to 3" in diameter into valuable mulch. This versatile machine is also capable of efficiently processing twigs, leaves, and garden composting materials up to 3/8" in diameter. With its large chip bag capacity of up to 4.3 bushels, you can work continuously without interruptions. The inclusion of extra large feed chutes ensures a smooth workflow, while the convenient drop stand, removable tow bar, and durable off road tires make transportation and breeze.

SPECIFICATION

ENGINE	KOHLER® 2000 Series RH265 6.5 HP 196 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	4.10/3.50-4 Ø10.2" (Ø25.4 cm) O.D. x 3.5" (8.9 cm)
WHEELBASE	21.7" (55 cm)
CHIPPING CAPACITY	Ø3" (Ø7.6 cm) (side feed chute) Ø3/8" (Ø0.95 cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
CHIP BAG CAPACITY	4.3 bushels (0.15 CBM)
COUPLER	Lawn tractor/ATV hitch pin
DIMENSIONS	41.7" (L) x 34.3" (W) x 37.4" (H) 106cm (L) x 87cm (W) x 95cm (H)
WEIGHT	136.7lb (62kg)
SHIPPING DIMENSIONS	29.5" (L) x 22" (W) x 20.9" (H) 75cm (L) x 56cm (W) x 53cm (H)
SHIPPING WEIGHT	158.7lb (72kg)
WARRANTY	2-year KOHLER® engine 1-year DK2 chassis



3-INCH 7 HP 208 CC DISK CHIPPER SHREDDER

ITEM NUMBER

OPC503

5

UPC

826518005487



DESCRIPTION

The ATV-towable 3-inch direct drive OPC503 chipper shredder is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, a removable key lock shutoff, and ATV-locking off-road tires.

SPECIFICATION

ENGINE KOHLER® Command PRO® CH270 7 HP 208 cc

GEARBOX 10.7 ft/lb (14.5 Nm) gross torque

WHEELS & TIRES ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm)

WHEELBASE 28" (71.1 cm)

CHIPPING CAPACITY Ø3" (Ø7.6 cm) (side feed chute)
Ø3/8" (Ø0.95 cm) (top-loading hopper)

CUTTERS Double edge chipper blades and quad hammer shredders

CHIPPER SHREDDER Leaves, brush, garden compost

EXPULSION CHUTE Adjustable

COUPLER 2" (5.08 cm)

DIMENSIONS 71" (L) x 36.5" (W) x 48" (H)
180.3 cm (L) x 92.7 cm (W) x 121.9 cm (H)

WEIGHT 187 lb (84.8 kg)

SHIPPING DIMENSIONS 43" (L) x 23" (W) x 22" (H)
109.2 cm (L) x 58.4 cm (W) x 55.9 cm (H)

SHIPPING WEIGHT 199 lb (90.3 kg)

WARRANTY 3-year KOHLER® engine
1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Direct drive combo chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6 cm) through the side feed chute and brush up to Ø3/8" (Ø0.95 cm) through the top-loading hopper
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm) tires on ATV-locking wheels with a 28" (71.1 cm) wheelbase **4**
- Removable key shutoff
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



3-INCH 7 HP 208 CC DISK CHIPPER SHREDDER & VACUUM

ITEM NUMBER

OPC503V

UPC

827518006979

6



DESCRIPTION

The ATV-towable 3-inch direct drive OPC503V chipper shredder vacuum combo is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, a removable key lock shutoff, and ATV-locking off-road tires.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm)
WHEELBASE	28" (71.1 cm)
CHIPPING CAPACITY	Ø3" (Ø7.6 cm) (side feed chute) Ø3/8" (Ø0.95 cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and quad hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	71" (L) x 36.5" (W) x 48" (H) 180.3 cm (L) x 92.7 cm (W) x 121.9 cm (H)
WEIGHT	187 lb (84.8 kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 22" (H) 109.2 cm (L) x 58.4 cm (W) x 55.9 cm (H)
SHIPPING WEIGHT	199 lb (90.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Vacuum kit included **2**
- Direct drive combo chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6 cm) through the side feed chute and brush up to Ø3/8" (Ø0.95 cm) through the top-loading hopper
- Extra large feed chutes **3**
- Drop stand and handy removable tow bar **4**
- 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm) tires on ATV-locking wheels with a 28" (71.1 cm) wheelbase **5**
- Removable key shutoff
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



4-INCH 7 HP 208 CC KINETIC DRUM CHIPPER

ITEM NUMBER

OPC524

7

UPC

827518007259



DESCRIPTION

The OPC524 4-inch kinetic chipper is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop.

The engine delivers 10.5 ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 4-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims
CHIPPING CAPACITY	Ø4" (Ø10.16 cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø4" (Ø10.16 cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76 cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231.1 cm (L) x 76.2 cm (W) x 116.8 cm (H)
WEIGHT	300 lb (136.1 kg)
SHIPPING DIMENSIONS	34" (L) x 22" (W) x 35" (H) 86.4 cm (L) x 55.9 cm (W) x 88.9 cm (H)
SHIPPING WEIGHT	330 lb (149.7 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Chips through trees and branches up to 4" (10.2 cm) in diameter
- Dual-belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 4" (10.2 cm) in diameter **2**
- 175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (Ø15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and E-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76 cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



5-INCH 9.5 HP 277 CC KINETIC DRUM CHIPPER

ITEM NUMBER

OPC525

UPC

827518008560

FEATURES

- Powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine **1**
- Chips through trees and branches up to 5" (12.7 cm) in diameter
- Dual-belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 5" (12.7 cm) in diameter **2**
- 175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (Ø15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and E-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76 cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

DESCRIPTION

The OPC525 5-inch kinetic chipper is powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop.

The engine delivers 13.9 ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 5-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH395 9.5 HP 277 cc
GEARBOX	13.9 ft/lb (18.8 Nm) gross torque
WHEELS & TIRES	175/70-6 Ø13.5" (Ø34.3 cm) OD x 5" (12.7 cm) tires on Ø6" (15.2 cm) x 4.5" (11.4 cm) bearing-mounted ATV rims
CHIPPING CAPACITY	Ø5" (Ø12.7 cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø5" (Ø12.7 cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76 cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231 cm (L) x 76.2 cm (W) x 116.8 cm (H)
WEIGHT	308.6 lb (140 kg)
SHIPPING DIMENSIONS	35.8" (L) x 22" (W) x 37.8" (H) 91 cm (L) x 56 cm (W) x 96 cm (H)
SHIPPING WEIGHT	352.7 lb (160 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



5-INCH 14 HP 429 CC AUTO-FEED ELECTRIC START DISK CHIPPER

ITEM NUMBER

OPC505AE

9

UPC

827518006702



DESCRIPTION

Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine featuring electric start-up and a self contained auto-feed system with hydraulic roller speeds up to 600 RPM. The OPC505AE features a 3600 RPM drive and auto-adjusting feed chamber to demolish trees up to 5.25 inches in diameter, internal free-spinning teeth, large feed chute, adjustable pickup height rotational expulsion chute, tool-free 180° adjustable 61-inch chip chute perfect for pickup truck bed loading, and includes a set of lockout keys, safety glasses, ear protection, work gloves, oil bottle and assembly tools.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	D.O.T. approved 8.00-7 Ø16" (Ø40.6 cm) OD
WHEELBASE	47" (119.4 cm)
CHIPPING CAPACITY	Ø5.25" (Ø13.3 cm)
BLADES & TEETH	High-speed disk-mounted steel and free-spinning internal 45# steel teeth
CHIPPER SHREDDER	Auto-adjusting from Ø1/8" (Ø0.32 cm) brush to Ø5.25" (Ø13.3 cm) trees
SELF-FEEDING	Auto blade feeding hydraulic system
EXPULSION CHUTE	Truck bed height with 180° adjustable spout
COUPLER	2" (5.08 cm)
DIMENSIONS	91" (L) x 40" (W) x 69" (H) 231.1 cm (L) x 101.6 cm (W) x 175.3 cm (H)
WEIGHT	638 lb (289.4 kg)
SHIPPING DIMENSIONS	63" (L) x 33" (W) x 45" (H) 160 cm (L) x 83.8 cm (W) x 114.3 cm (H)
SHIPPING WEIGHT	726 lb (329.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine ¹
- Dual swing-open chutes for easy drum access
- High-speed disk chipper shredder with free-spinning internal teeth ²
- 600RPM hydraulic feed
- Auto blade feeding system
- Auto adjust cutters for brush up to 5.25" (13.3cm) diameter trees
- All-terrain on/off road tires D.O.T. approved (not for highway use) with included 2" (5.08cm) ball tow bar ³
- Dual, tool free rotational spout on chip chute
- Extra-large reinforced feed hopper with integrated equipment moving handles and e-stop shutoff ⁴
- Electric start (battery included)
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



10



DESCRIPTION

The DK2 POWER OPC506 is a 6-inch cyclonic chipper shredder is powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine, equipped with dual 12-inch, double-edge reversible cutting blades that auto-adjust to pulverize trees and brush up to 6.25 inches in diameter.

Featuring large quick open hoppers, 59-inch truck bed height chip chute with adjustable cast iron rotating hood, easy drop stand, removable tow bar, 2-inch hitch, premium built-in tool box, Key shutoff with lock out safety switch. Extended 48-inch safety stability axle with D.O.T. tires. Safety kit includes tools, glasses, ear protection and gloves.

SPECIFICATION

ENGINE KOHLER® Command PRO® CH440 14 HP 429 cc

GEARBOX 22.7 ft/lb (30.7 Nm) gross torque

WHEELS & TIRES D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm)

WHEELBASE 48" (121.9 cm)

CHIPPING CAPACITY Ø6.25" (Ø15.9 cm)

BLADES Steel double edge reversible

CHIPPER SHREDDER Auto-adjusting from Ø3/8" (Ø0.95 cm) brush to Ø6.5" (Ø16.5 cm) trees

EXPULSION CHUTE Tool-free swing open and 180° adjustable

COUPLER 2" (5.08 cm)

DIMENSIONS 102" (L) x 47" (W) x 59" (H)
259.1 cm (L) x 119.4 cm (W) x 149.9 cm (H)

WEIGHT 395 lb (179.2 kg)

SHIPPING DIMENSIONS 44" (L) x 26" (W) x 44" (H)
111.8 cm (L) x 66 cm (W) x 111.8 cm (H)

SHIPPING WEIGHT 461 lb (209.1 kg)

WARRANTY 3-year KOHLER® engine
1-year DK2 chassis



ITEM NUMBER

OPC506

UPC

826518005517

FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Reversible double-edge reversible high-speed cutting blades **2**
- Auto-adjusting cyclonic drum chamber deteriorates trees and brush up to 6.25" (15.9 cm) in diameter
- Large, quick-open hoppers
- 59" (149.9 cm) pickup truck bed height expulsion chute with adjustable cast iron rotating hood and easy drop stand **3**
- Removable tow bar with 2" (5.08 cm) hitch receiver **4**
- Premium built-in toolbox
- Key shutoff with lock out safety switch
- Extended 48" (121.9 cm) safety stability axle
- D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm) **5**
- Includes safety kit
- Integrated chute handles, powder-coated for durability
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



6-INCH 14 HP 429 CC ELECTRIC START CYCLONIC DRUM CHIPPER SHREDDER

ITEM NUMBER

OPC506E

11

UPC

827518008607

DESCRIPTION

The DK2 POWER OPC506E is a 6-inch cyclonic chipper shredder is powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine, equipped with dual 12-inch, double-edge reversible cutting blades that auto-adjust to pulverize trees and brush up to 6.25 inches in diameter.

Featuring electric start, large quick open hoppers, 59-inch truck bed height chip chute with adjustable cast iron rotating hood, easy drop stand, removable tow bar, 2-inch hitch, premium built-in tool box, Key shutoff with lock out safety switch. Extended 48-inch safety stability axle with D.O.T. tires. Safety kit includes tools, glasses, ear protection and gloves.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm)
WHEELBASE	48" (121.9 cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9 cm)
BLADES	Steel double edge reversible
CHIPPER SHREDDER	Auto-adjusting from Ø3/8" (Ø0.95 cm) brush to Ø6.5" (Ø16.5 cm) trees
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	395 lb (179.2 kg)
SHIPPING DIMENSIONS	44" (L) x 26" (W) x 44" (H) 111.8 cm (L) x 66 cm (W) x 111.8 cm (H)
SHIPPING WEIGHT	461 lb (209.1 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Reversible double-edge reversible high-speed cutting blades **2**
- Auto-adjusting cyclonic drum chamber deteriorates trees and brush up to 6.25" (15.9 cm) in diameter
- Large, quick-open hoppers
- 59" (149.9 cm) pickup truck bed height expulsion chute with adjustable cast iron rotating hood and easy drop stand **3**
- Removable tow bar with 2" (5.08 cm) hitch receiver **4**
- Premium built-in toolbox
- Key shutoff with lock out safety switch
- Extended 48" (121.9 cm) safety stability axle
- D.O.T. approved 4.80-8 Ø17.5" (Ø44.5 cm) OD x 5.2" (13.2 cm) **5**
- Includes safety kit
- Integrated chute handles, powder-coated for durability
- Electric start (battery included)
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



6-INCH 14 HP 429 CC KINETIC CYCLONIC ELECTRIC START DRUM CHIPPER SHREDDER

ITEM NUMBER

OPC566E

UPC

827518006757

12



DESCRIPTION

The OPC566E is a 6-inch kinetic cyclonic chipper powered by an electric start, direct drive KOHLER® Command PRO® CH440 14 HP 429 cc engine with 22.7 ft/lb gross torque to demolish trees up to 6.25 inches in diameter. Equipped with double edge reversible 12-inch cutting blades that auto-adjust to pulverize trees and brush, dual tool-free swing-open chutes that quickly open for easy drum access, D.O.T. approved tires and a 48-inch extended axle for uneven ground and towing stability with front articulated ground wheels for easy equipment moving, a 2-inch hitch receiver and tow bar, and a rotational expulsion chute pickup truck height for bed loading.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
REAR WHEELS & TIRES	D.O.T. approved 4.80-8 Ø15" (Ø41.9 cm) OD x 4.25" (10.8 cm) on 9" (22.9 cm) rims
FRONT WHEELS & TIRES	Off-road 4.10-4 Ø10" (Ø25.4 cm) OD on Ø5" (Ø12.7 cm) rims
WHEELBASE	48" (121.9 cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9 cm)
CUTTERS	12" (30.5 cm) double edge reversible chipper blades
CHIPPER SHREDDER	Auto-adjusting from Ø1/8" (Ø0.32 cm) up to Ø6.25" (Ø15.9 cm) trees and brush
EXPULSION CHUTE	59" (149.9 cm) truck bed height with 180° adjustable spout
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	594 lb (269.4 kg)
SHIPPING DIMENSIONS	45" (L) x 31" (W) x 48" (H) 114.3 cm (L) x 78.7 cm (W) x 121.9 cm (H)
SHIPPING WEIGHT	726 lb (329.3 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Dual-belt drive drum transmission with 12" (30.5 cm) double edge reversible cutting blades **2**
- Auto adjust cutters for trees and brush up to 6.25" (15.9 cm) in diameter
- 48" (121.9 cm) axle with D.O.T. approved 4.80-8 Ø15" (Ø41.9 cm) OD rear tires on Ø9" (Ø22.9 cm) rims and off-road 4.10-4 Ø10" (Ø25.4 cm) OD front tires on Ø5" (Ø12.7 cm) rims **3**
- Includes safety kit
- Electric start (battery included) **4**
- CE safety approved shutoff
- Dual tool free swing open chutes
- Tool-free 180° rotational spout on 59" (149.9 cm) truck bed height expulsion chute
- Extra-large feed chute with integrated equipment moving handles
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



12-INCH 14 HP 429 CC STUMP GRINDER

ITEM NUMBERS

OPG777

13

UPC

826518005524

DESCRIPTION

Introducing the OPG777 12-inch stump grinder powered by a KOHLER® Command PRO® CH440 14HP 429cc engine and mounted on a heavy-duty welded 2-inch solid steel frame structurally engineered for endurance performance with a heavy-duty 2-inch axle and dual locking hitch pins for trouble-free wheel brakes and transport over rough terrain. The direct drive delivers 3600 RPM and 22.7 ft/lb of gross torque to a 12-inch solid steel cutting wheel mounted on premium pillar bearings. This machine demolishes stumps with a total of 9 carbide teeth cutting 3-1/2 inches wide per cut and cuts any diameter stump 12-inches above and 9-inches below ground. Additional features include key shut-off, locking throttle, drop stand, and solid bar lift handles.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm)
WHEELBASE	32" (81.3 cm)
TEETH	9 x FC11C carbide cast mounted
STUMP CAPACITY	Any diameter, 12" (30.5 cm) high
CUTTING WIDTH	3.5" (8.9 cm)
COUPLER	2" (5.08 cm)
DIMENSIONS	91" (L) x 32" (W) x 52" (H) 231.1 cm (L) x 81.3 cm (W) x 132.1 cm (H)
WEIGHT	234 lb (106.1 kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 25" (H) 109.2 cm (L) x 58.4 cm (W) x 63.5 cm (H)
SHIPPING WEIGHT	275 lb (124.7 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14 HP 429 cc engine **1**
- Demolishes stumps with 9 carbide teeth cutting 3.5" (8.9 cm) wide per cut. **2**
- Cuts any diameter stump 12" (30.5 cm) above and 9" (22.9 cm) below ground.
- Extreme duty 2" (5.08 cm) x 2" (5.08 cm) axle with dual locking hitch pins for trouble-free wheel brakes and transport over rough terrain
- 145/70-6 Ø13.75" (Ø34.9 cm) OD x 5.25" (13.3 cm) tires on ATV-locking wheels **3**
- Key shut-off
- Locking throttle
- Drop stand and removable tow bar **4**
- Solid bar lift handles
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



14-INCH 14 HP 429 CC ELECTRIC START STUMP GRINDER

14



ITEM NUMBER

OPG888E

UPC

827518006719

DESCRIPTION

Introducing the OPG888E, powered by a KOHLER® Command PRO® CH440 14HP 429cc engine with electric start, and is capable of demolishing stumps 14 inches above ground and 10 inches below ground with its dual V-belt direct drive 22.7 ft/lb gross torque and 12 FC11C carbide cast mounted teeth that cut 4 inches wide. This machine features a heavy-duty frame, 145/70-6 ATV tires, a removable flip tow bar for easy trolley or off-road towing up to 15 mph (24 km/h), an operator controlled posi-lock wheel brake for pivot grinding, and a bow handle with CE safety approved hands-off shut down.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14 HP 429 cc
GEARBOX	22.7 ft/lb (30.7 Nm) gross torque
WHEELS & TIRES	ATV 145/70-6 Ø13.75" (Ø35 cm) x 5.25" (13.3 cm)
WHEELBASE	32" (81.3 cm)
TEETH	12 x FC11C carbide cast mounted
STUMP CAPACITY	Any diameter, 14" (35.6 cm) high
CUTTING WIDTH	4" (10.2 cm)
BATTERY	12V 14Ah
COUPLER	2" (5.08 cm)
DIMENSIONS	102" (L) x 48" (W) x 59" (H) 259.1 cm (L) x 121.9 cm (W) x 149.9 cm (H)
WEIGHT	285 lb (129.3 kg)
SHIPPING DIMENSIONS	42" (L) x 31" (W) x 26" (H) 106.7 cm (L) x 78.7 cm (W) x 66 cm (H)
SHIPPING WEIGHT	308 lb (139.7 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Performs 4" (10.2 cm) wide cuts with 12 FC11C carbide cast mounted teeth **2**
- Heavy-duty steel frame
- ATV 145/70-6 Ø13.75" (Ø35 cm) x 5.25" (13.3 cm) tires on a 32" (81.3 cm) wheelbase **3**
- Removable flip tow bar with a 2" (5.08 cm) hitch receiver **4**
- Operator controlled Posi-lock wheel brake for pivot grinding
- Bow handle with CE safety approved hands-off shut-down **5**
- Demolishes any diameter stump up to 14" (35.6 cm) above and 10" (25.4 cm) below ground
- 12V 14Ah battery included for electric start capability
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



ITEM NUMBERS

OPT118

15

UPC

826518005586

DESCRIPTION

The OPT118 is powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine equipped with a direct drive chain trencher that travels at 180 ft/min to create 18-inch deep by 4-inch wide channels using its 3/8-inch plow plates and 21 quick-change carbide alloy high-pressure tri-cut teeth that run at 400RPM, and to ensure a cleaner operation, the OPT118 is equipped with a 6-inch side off-loading auger that removes dirt from the channel.

This machine also features a heavy-duty steel construction, adjustable handle with a release and stop safety hand grip, and 15-inch 6.00-6 wheels with auto-lock in reverse capability.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	6.00-6 Ø15" (Ø38.1 cm) OD auto-lock in reverse
CHAIN SPEED	180 ft/min (54.9 m/min)
CHAIN DIMENSION	63" (160 cm)
TRENCH SIZE	4" (W) x 18" (D) 10.2 cm (W) x 45.7 cm (D)
TEETH	21 x carbide alloy high-pressure
AUGER	6" (15.2 cm) side off-load
DIMENSIONS	95" (L) x 47" (W) x 59" (H) 241.3 cm (L) x 119.4 cm (W) x 149.9 cm (H)
WEIGHT	335 lb (152 kg)
SHIPPING DIMENSIONS	41" (L) x 30" (W) x 33" (H) 104.1 cm (L) x 76.2 cm (W) x 83.8 cm (H)
SHIPPING WEIGHT	362 lb (164.2 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine ¹
- Direct chain drive trencher chain and auger
- 5 depth positions
- Auto-locking in reverse 6.00-6 Ø15" (Ø38.1 cm) OD tires and wheels for digging in reverse ²
- 3/8" (0.95 cm) plow plates with 21 carbide alloy high-pressure quick change teeth ³
- Adjustable handle with release and stop safety hand grip ⁴
- 6" (15.2 cm) direct drive auger
- Heavy gauge steel construction
- Direct drive with 400RPM tri-cut teeth chain drive at 180ft/min (54.9 m/min) dig rate
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



27-TON 6.5 HP 196 CC HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS227

UPC

827518008577

FEATURES

- Powered by a KOHLER® SH265 6.5 HP 196 cc engine **1**
- 25.5" x Ø19.6" (64.8 cm x Ø49.8 cm) log capacity
- 8" (20.3 cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved Ø16" (Ø40.6 cm) OD road tires sitting on a 37" (94 cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15 GPM (56.8 LPM) pump
- 6.5 gallon (24.6 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08 cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**

DESCRIPTION

Introducing the 27-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS227 is driven by a powerful KOHLER® SH265 6.5 HP 196 cc engine. This machine is capable of splitting up to 25.5 inches in length and 19.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8-inch heat-treated steel wedge. The OPS227 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5 HP 196 cc
SPLITTING CAPACITY	25.5" (L) x Ø19.6" 64.7 cm (L) x Ø54.8 cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4" (Ø10.2 cm) x 24" (60.9 cm) stroke
HYDRAULIC FLOW RATE	15 GPM (56.8 LPM), two-stage
HYDRAULIC OIL CAPACITY	6.5 gal (24.6 L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8" (20.3 cm) high, heat-treated steel
BEAM	8" (20.3 cm) foot plate
VALVE	Auto-retract with adjustable detent
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16" (Ø40.6 cm) OD
WHEELBASE	37" (94 cm)
COUPLER	2" (5.08 cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	87.4" (L) x 49.2" (W) x 35.8" (H) @ 507 lb 222 cm (L) x 125 cm (W) x 91 cm (H) @ 230 kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 551.2 lb 180 cm (L) x 80 cm (W) x 50 cm (H) @ 250 kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



32-TON 6.5 HP 196 CC HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS232

17

UPC

827518008584

DESCRIPTION

Introducing the 32-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS232 is driven by a powerful KOHLER® SH265 6.5 HP 196 cc engine. This machine is capable of splitting up to 25.5 inches in length and 21.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8.5-inch heat-treated steel wedge. The OPS232 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5 HP 196 cc
SPLITTING CAPACITY	25.5" (L) x Ø21.6" 64.7 cm (L) x Ø54.8 cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4.5" (Ø11.4 cm) x 24" (60.9 cm) stroke
HYDRAULIC FLOW RATE	15 GPM (56.8 LPM), two-stage
HYDRAULIC OIL CAPACITY	8.5 gal (32 L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8.5" (21.6 cm) high, heat-treated steel
BEAM	8.5" (21.6 cm) foot plate
VALVE	Auto-retract with adjustable detent
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16" (Ø40.6 cm) OD
WHEELBASE	37" (94 cm)
COUPLER	2" (5.08 cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	89.4" (L) x 51.2" (W) x 37.4" (H) @ 529.1lb 227 cm (L) x 130 cm (W) x 95 cm (H) @ 240kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 573 lb 180 cm (L) x 80 cm (W) x 50 cm (H) @ 260 kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5 HP 196 cc engine **1**
- 25.5" x Ø21.6" (64.8 cm x Ø54.8 cm) log capacity
- 8.5" (21.6 cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved Ø16" (Ø40.6 cm) OD road tires sitting on a 37" (94cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15 GPM (56.8 LPM) pump
- 8.5 gallon (32 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08 cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



40-TON 7 HP 208 CC KINETIC HORIZONTAL LOG SPLITTER

ITEM NUMBERS

OPS240

UPC

826518005746

FEATURES

- Powered by a KOHLER® Command PRO® Commercial CH270 7 HP 208 cc engine **1**
- 8" (20.32 cm) solid steel expansion wedge **2**
- Oversized steel worktable with quad-log slides **3**
- H-beam height sits at 25" (63.5 cm)
- Heat-treated ram with bearing glide force and auto-retraction
- Extended stability stand
- ATV-locking wheels **4**
- Fits on a 2" (5.08 cm) hitch receiver for easy towing
- Quick-release clam shell body for easy access to interior of the unit **5**
- Safety lock out
- Super-quick 1 second cycling time
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

DESCRIPTION

Introducing the DK2 POWER OPS240 40-ton kinetic log splitter, powered by a KOHLER® CH270 7HP 208cc Command PRO® engine for outstanding performance. Equipped with an oversized reinforced steel work table, safety lockout and a clam shell quick-access body for easy use and maintenance.

The OPS240 has an 8-inch expansion wedge and an auto-retracting bearing-guided ram to drive through logs up to 22 inches in diameter and up to 22 inches in length. Keep yourself safe while working with its extended stability stand and ATV locking wheels, keeping the splitter securely in place.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
GEARBOX	10.7 ft/lb (14.5 Nm) gross torque
WHEELS & TIRES	ATV-locking
SPLITTING CAPACITY	Ø22" x 22" (L) Ø55.9 cm x 55.9 cm (L)
WEDGE	8" (20.32 cm), steel
H-BEAM	25" (63.5 cm) ground clearance
CYCLE TIME	1 second
COUPLER	2" (5.08 cm)
DIMENSIONS	120" (L) x 37" (W) x 44" (H) 304.8 cm (L) x 94 cm (W) x 111.8 cm (H)
WEIGHT	616 lb (279.4 kg)
SHIPPING DIMENSIONS	71" (L) x 27" (W) x 26" (H) 180.3 cm (L) x 68.6 cm (W) x 66 cm (H)
SHIPPING WEIGHT	690 lb (313 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



17-INCH x 21-INCH 7 HP 208 CC PLATE COMPACTOR

ITEM NUMBER

OPV425

19

UPC

827518008249

DESCRIPTION

Featuring a large 17-inch by 21-inch base plate, the OPV425 plate compactor doesn't disappoint when it comes to compacting performance, and the power that drives this machine comes from a KOHLER® Command PRO® CH270 7HP 208cc engine.

With a compacting force of 3,600 lb (16 kn) at 4,750 vibrations per minute, this unit is the perfect solution for your compacting needs.

Designed with conveniently placed, 27.5-inch folding handles for easy transportation and storage, open design to reduce dirt build-up, and a central-mounted, fully enclosed exciter for even compacting force over the entire base plate.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
BASE PLATE	17" (43.2 cm) x 21" (53.3 cm)
HANDLE LENGTH	27.5" (69.9 cm)
VIBRATION FREQUENCY	4,750 VPM
CENTRIFUGAL FORCE	3,600 lb/ft (16 kn)
COMPACTING DEPTH	11.8" (30 cm)
SPEED	12.6 in/sec (32 cm/sec)
DIMENSIONS	17" (L) x 21" (W) x 29" (H) 43.2 cm (L) x 53.3 cm (W) x 73.7 cm (H)
WEIGHT	198.4 lb (90 kg)
SHIPPING DIMENSIONS	18.9" (L) x 26.4" (W) x 28.3" (H) 48 cm (L) x 67.1 cm (W) x 72 cm (H)
SHIPPING WEIGHT	227 lb (103 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® CH270 7HP 208cc Command PRO® Commercial Engine **1**
- 17" (43.2 cm) x 21" (53.3 cm) solid steel base plate
- Conveniently placed 27.5" (69.9 cm) folding handles for easier transportation and stowaway **2**
- Open design to reduce dirt and residue build-up **3**
- Central-mounted, fully enclosed exciter for even compacting force over the entire base plate **4**
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



1100 LB 48V SELF-DRIVE ELECTRIC DUMP CART

20



ITEM NUMBER

OPD810

UPC

XXXXXXXXXXXX

DESCRIPTION

With a wet bucket for sand, gravel, concrete and more, the DK2 POWER OPD811 Self-Drive Electric Powered Hydraulic Dump Cart runs for up to 6 hours on one charge with its 48V 20Ah battery and moves it all. Equipped with a hydraulic electric lift, this unit is capable of tipping its wet bucket 90 degrees vertically for easy unloading. The OPD811 comes with throttle bar speed control and articulated floating rear wheels to keep your load level and steady. Moving around the job site is effortless with forward and reverse speeds of 6 MPH and dual front wheel drive to climb over rough terrain.

SPECIFICATION

BATTERY	48V, 32Ah lead-acid
MOTOR	1000W 48V brushless DC motor
PAYLOAD CAPACITY	1,100 lb (499 kg)
DRIVE WHEELS & TIRES	All-terrain 16 x 6.5-8
REAR WHEELS & TIRES	Articulated 13 x 5.00-6
MAX SPEED	3 mph
BRAKING	Electromagnetic
TIPPING	Gas rod
RUN TIME	8-10 hrs
CHARGE TIME	6-7 hrs
BUCKET SIZE	8.3 ft ³ (0.24 m ³) 62.3 gal (236 L)
DIMENSIONS	68.9" (L) x 28.7" (W) x 42.1" (H) 175 cm (L) x 72.8 cm (W) x 107 cm (H)
WEIGHT	392.4 lb (178 kg)
SHIPPING DIMENSIONS	52.4" (L) x 30.3" (W) x 33.9" (H) 133 cm (L) x 77 cm (W) x 86 cm (H)
SHIPPING WEIGHT	463 lb (210 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 48V, 32Ah battery and equipped with real-time battery capacity and voltage indicator on operator console **1**
- 8.34 ft³ sealed steel wet bucket **2**
- All-terrain 16 x 6.5-8 front wheel drive tires, with electric drive up to 3 mph and universal 13 x 5.00-6 rear tires to move effortlessly around job sites **3**
- Tipping capability for easy unloading **4**
- Throttle bar speed control with articulated floating rear wheels keep your load level and steady
- 30W headlights and auxiliary lights **5**
- 8-10 hour runtime and 6-7 hour charging time
- Electromagnetic braking system

1100 LB 48V SELF-DRIVE ELECTRIC HYDRAULIC DUMP CART

ITEM NUMBER

OPD811

21

UPC

826518005722

DESCRIPTION

With a wet bucket for sand, gravel, concrete and more, the DK2 POWER OPD811 self-drive electric powered hydraulic dump cart runs for up to 6 hours on one charge with its 48V 20Ah battery and moves it all. Equipped with a hydraulic electric lift, this unit is capable of tipping its wet bucket 90 degrees vertically for easy unloading.

The OPD811 comes with throttle bar speed control and articulated floating rear wheels to keep your load level and steady. Moving around the job site is effortless with forward and reverse speeds of 6 MPH and dual front wheel drive to climb over rough terrain.

SPECIFICATION

BATTERY	48V 20Ah (4 x 12V series)
PAYLOAD CAPACITY	1,100 lb (499 kg)
DRIVE WHEELS & TIRES	All-terrain 4.00-8 Ø16" (Ø40.6cm) OD
REAR WHEELS & TIRES	Off-road 4.10-4 Ø10" (Ø25.4cm) OD on Ø5" (Ø12.7 cm) rims
MAX SPEED	6 mph (9.7 km/h)
RUN TIME	6 hrs
CHARGE TIME	5 hrs
BUCKET	8 ft ³ (0.23 m ³), 45 gal (170.3 L), sealed steel
DIMENSIONS	60" (L) x 40" (W) x 40" (H) 152.4 cm (L) x 101.6 cm (W) x 101.6 cm (H)
WEIGHT	572 lb (259 kg)
SHIPPING DIMENSIONS	54" (L) x 34" (W) x 32" (H) 137.2 cm (L) x 86.4 cm (W) x 81.3 cm (H)
SHIPPING WEIGHT	616 lb (279.4 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 48V 20Ah battery ¹
- 8 ft³ (0.23 m³) 45 gal (170.3 L) sealed steel wet bucket ²
- All-terrain 4.00-8 Ø16" (Ø40.6 cm) OD front wheel drive tires, with electric drive up to 6 mph (9.7 km/h) and off-road 4.10-4 Ø10" (Ø25.4 cm) OD rear tires on Ø5" (Ø12.7 cm) rims to move effortlessly around job sites ³
- Hydraulic electric lift cylinder to tip bucket to 90° vertical for easy unloading ⁴
- Throttle bar speed control with articulated floating rear wheels keep your load level and steady
- Improved "magic brake" system to brake upon the release of the brake handle, making your hauls safe and secure ⁵

660 LB 7 HP 208 CC GAS-POWERED DUMP CART

22



ITEM NUMBER

OPD813

UPC


827518036273

DESCRIPTION

The OPD813 660 lb Gas-Powered Dump Cart with Tracks is a tool that is designed to make heavy lifting and transport easier. Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine, with 3 forward gears and 1 reverse gear, this gas-powered dump cart can hold up to 660 pounds and has a gas rod tipping capability to make unloading quick and easy. The cart also boasts 7.1-inch off-road tracks for versatile mobility, giving you the ability to traverse difficult terrain with ease. Made from heavy-duty UV powder coated steel, this cart is built to last and withstand harsh outdoor conditions. The detachable 40.1" x 33.9" x 8" bucket is perfect for carrying heavy loads, making it an ideal choice for those who need to transport materials over long distances.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7 HP 208 cc
LOAD CAPACITY	660 lb (300 kg)
TRANSMISSION	3 forward gears, 1 reverse gear
DUMP MECHANISM	Gas rod driven
TRACKS	7.1" (18 cm) wide
BUCKET	40.1" (L) x 33.9" (W) x 8" (H) 101.9 cm (L) x 86.1 cm (W) x 20.3 cm (H)
CONSTRUCTION	Heavy-duty UV powder-coated steel
WEIGHT	401 lb (182 kg)
SHIPPING DIMENSIONS	45.7" (L) x 30.3" (W) x 34.3" (H) 116.1 cm (L) x 77 cm (W) x 87.1 cm (H)
SHIPPING WEIGHT	449.7 lb (204 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7 HP 208 cc engine **1**
- Built to hold up to 660 lbs of weight, making it perfect for heavy-duty outdoor projects
- 3 forward gears and 1 reverse gear, this cart is easy to control and maneuver
- Gas rod tipping capability makes it easy to dump and unload heavy loads **2**
- 7.1" off-road tracks provide versatile mobility and can navigate rough terrain **3**
- The 40.1" x 33.9" x 8" bucket is detachable and perfect for carrying heavy loads **4**
- The cart is built with heavy-duty UV powder-coated steel, ensuring that it will last for years to come
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



ITEM NUMBER

OPD814

23

UPC

827518036280



DESCRIPTION

The OPD814 1100 lb Gas-Powered Dump Cart with Tracks is the perfect solution to transport heavy loads with ease. Powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine and equipped with 3 forward gears and 1 reverse gear, this cart can hold up to 1100 lbs, making it ideal for a variety of tasks. The 2.4 GPM hydraulic tipping capability and 7.1" off-road tracks provide versatile mobility, allowing you to easily navigate through rough terrain. The integrated 37.4" x 26.8" (W) x 18.3" (H) bucket can carry heavy loads, and the cart is built with heavy-duty UV powder-coated steel, making it durable and long-lasting. Whether you're working on a construction site, a farm, or just need a reliable cart for your next DIY project, the OPD814 1100 lb Gas-Powered Dump Cart with Tracks is the perfect solution for all your needs.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH395 9.5 HP 277 cc
PAYLOAD CAPACITY	1,100 lb (499 kg)
TRANSMISSION	3 forward gears, 1 reverse gear
DUMP MECHANISM	Hydraulic driven
HYDRAULIC FLOW RATE	2.4 GPM (9 LPM)
TRACKS	7.1" (18 cm) wide
BUCKET	37.4" (L) x 26.8" (W) x 18.3" (H) 95 cm (L) x 68.1 cm (W) x 46.5 cm (H)
CONSTRUCTION	Heavy-duty UV powder-coated steel
WEIGHT	586.4 lb (266 kg)
SHIPPING DIMENSIONS	65.7" (L) x 30.3" (W) x 44.5" (H) 167 cm (L) x 77 cm (W) x 113 cm (H)
SHIPPING WEIGHT	679 lb (308 kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH395 9.5 HP 277 cc engine **1**
- Perfect for hauling heavy loads over rough terrain
- Capable of holding up to 1100 lbs, it is perfect for transporting heavy equipment and materials quickly and easily
- The 2.4 GPM hydraulic tipping capability makes it easy to unload, so you can get back to work quickly **2**
- 3 forward gears and 1 reverse gear, this dump cart is incredibly versatile and easy to maneuver, even over difficult terrain
- Extra-large integrated 37.4" x 26.8" x 18.3" bucket **3**
- The 7.1" off-road tracks provide excellent traction and mobility, even in muddy or wet conditions **4**
- Build with heavy-duty UV powder-coated steel, ensuring that it will last for years to come
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty





DKA1

ELITE ENERGY™

3-INCH 57.6V BATTERY POWERED DISK CHIPPER SHREDDER

ITEM NUMBER

OPC503EV-K

25

UPC

827518009130

DESCRIPTION

The DK2 OPC503EV-K 3-Inch 57.6V Battery Powered Disk Chipper Shredder is the ultimate tool for efficient and effective yard work. With an EV motor and advanced LiFePO4 technology, this machine is designed to handle even the toughest yard waste with ease. Whether you're chipping branches, shredding leaves, or converting brush into mulch, the DK2 3-Inch 57.6V Li-ion Powered Disk Chipper Shredder will make quick work of the task. With its compact size and user-friendly design, it's easy to maneuver and operate, making it the perfect tool for homeowners and landscapers alike.

SPECIFICATION

BATTERY	57.6V Max, 1024Wh, 20Ah LiFePO4
MOTOR	2,000Wh 3,500 RPM cordless brushless EV motor
TORQUE	4.1 ft/lb (5.5 Nm) rated 18.4 ft/lb (25 Nm) peak
CHARGER	120V AC/DC 200W
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9 cm) O.D. x 5.25" (13.3 cm)
WHEELBASE	28" (71.1 cm)
CHIPPING CAPACITY	Ø3" (Ø7.6 cm) (side feed chute) Ø3/8" (Ø0.95 cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and quad hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08 cm)
DIMENSIONS	87.4" (L) x 41.7" (W) x 58.7" (H) 222 cm (L) x 106 cm (W) x 149.1 cm (H)
WEIGHT	210.5 lb (95.5 kg)
SHIPPING DIMENSIONS	44.5" (L) x 24" (W) x 21.7" (H) 113 cm (L) x 61 cm (W) x 55.1 cm (H)
SHIPPING WEIGHT	220.5 lb (100 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 57.6V, 1,024Wh, 20Ah, LiFePO4 lithium-ion battery **1**
- Equipped with a 3,500 RPM EV motor
- Comes with 120V AC/DC 200W charger
- Chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6 cm) through the side feed chute and brush up to Ø3/8" (Ø0.95 cm) through the top-loading hopper **2**
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 145/70-6 Ø13.75" (Ø34.9 cm) O.D. x 5.25" (13.3 cm) tires on ATV-locking wheels with a 28" (71.1 cm) wheelbase **4**
- Includes 1-year limited DK2 warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

20-TON 57.6V BATTERY POWERED HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS220EV-K

UPC

827518009000

FEATURES

- Powered by a 57.6V, 1,024Wh, 20Ah, LiFePO4 lithium-ion battery ¹
- Equipped with a 3,500 RPM EV motor
- Comes with 120V AC/DC 200W charger
- 10" (25.4 cm) pneumatic tires ²
- Solid heat-treated steel wedge ³
- Steel plunger beam with auto-retracting valve capable of splitting logs at Ø16" (Ø40.6 cm) in diameter and 20.5" (52.1 cm) in length ⁴
- Includes 1-year limited DK2 warranty

DESCRIPTION

Introducing the DK2 OPS220EV-K 57.6V Battery Powered Hydraulic Log Splitter, the ultimate tool for splitting logs with ease. This powerful machine is equipped with an EV motor and advanced LiFePO4 technology, ensuring that it's both durable and efficient. With a 20-ton split force, it can handle even the toughest logs with ease, and the hydraulic system ensures that you can split logs quickly and easily. Whether you're a professional logger or just someone who needs to split a few logs for the fireplace, this log splitter is the perfect tool for the job.

SPECIFICATION

BATTERY	57.6V Max, 1024Wh, 20Ah LiFePO4
MOTOR	2,000Wh 3,500 RPM cordless brushless EV motor
TORQUE	4.1 ft/lb (5.5 Nm) rated 18.4 ft/lb (25 Nm) peak
CHARGER	120V AC/DC 200W
WHEELS & TIRES	10" (25.4 cm) pneumatic
SPLITTING CAPACITY	Ø16" (Ø40.6 cm) x 20.5" (52.1 cm)
CYCLE TIME	12 seconds
WEDGE	Solid heat-treated steel
TYPE OF HYDRAULIC OIL	AW32/AW46
VALVE	Auto-retract with adjustable detent
DIMENSIONS	47.2" (L) x 35" (W) x 30.7" (H) 120 cm (L) x 88.9 cm (W) x 78 cm (H)
WEIGHT	177.4 lb (80.5 kg)
SHIPPING DIMENSIONS	35.8" (L) x 23.6" (W) x 19.1" (H) 91 cm (L) x 59.9 cm (W) x 48.5 cm (H)
SHIPPING WEIGHT	187.4 lb (85 kg)
WARRANTY	1-year limited



1271 CFM 57.6V BATTERY POWERED WALK-BEHIND LEAF BLOWER

ITEM NUMBER

OPB480EV-K

27

UPC

827518009260



DESCRIPTION

The DK2 OPB480EV-K 1,271 CFM 57.6V Battery Powered Walk-Behind Leaf Blower is the ultimate solution for tackling even the toughest leaf blowing jobs. With a powerful EV motor and advanced LiFePO4 technology, this walk-behind leaf blower can move up to 150 miles per hour and deliver 1,271 cubic feet per minute of air volume. That means you can clear large areas quickly and efficiently, without having to stop and recharge your battery. Whether you're a professional landscaper or a homeowner who takes pride in their yard, the DK2 OPB480EV-K is the perfect tool for keeping your outdoor spaces looking clean and tidy.

SPECIFICATION

BATTERY	57.6V Max, 1024Wh, 20Ah LiFePO4
MOTOR	2,000Wh 3,500 RPM cordless brushless EV motor
TORQUE	4.1 ft/lb (5.5 Nm) rated 18.4 ft/lb (25 Nm) peak
CHARGER	120V AC/DC 200W
MAX AIR FLOW	150 mph (241.4 km/h)
SPEED	215 ft/sec (65.5 m/sec)
AIR VOLUME (CFM)	1,271 ft³/min (36 m³/min)
DIMENSIONS	44.9" (L) x 43.3" (W) x 48" (H) 114 cm (L) x 110 cm (W) x 121.9 cm (H)
WEIGHT	157.6 lb (71.5 kg)
SHIPPING DIMENSIONS	26.4" (L) x 24" (W) x 22.1" (H) 67.1 cm (L) x 61 cm (W) x 56.1 cm (H)
SHIPPING WEIGHT	167.6 lb (76 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 57.6V, 1,024Wh, 20Ah, LiFePO4 lithium-ion battery ¹
- Equipped with a 3,500 RPM EV motor
- Comes with 120V AC/DC 200W charger
- Scrolled housing for efficient air flow production at 215 ft/sec (65.5 m/sec) that blows up to 1,271 ft³/min (36 m³/min) ²
- Adjustable outlet air deflector for added directional control while blowing leaves, brush, or yard debris at 150 mph (241.1 km/h) ³
- Front trolley wheel for easy mobility direction ⁴
- Ergonomic handle for optimal walk-behind control ⁵
- Includes 1-year limited DK2 warranty

2,200 PSI 2.4 GPM 57.6V BATTERY POWERED PRESSURE WASHER

28



ITEM NUMBER

OPW480EV-K

UPC

827518009284

DESCRIPTION

The DK2 OPW480EV-K 2,200 PSI 57.6V Battery Powered Pressure Washer is the ultimate tool for cleaning your outdoor spaces. With an EV motor and advanced LiFePO4 technology, this pressure washer delivers the power you need to blast away dirt, grime, and even stubborn stains. It's perfect for cleaning decks, patios, sidewalks, driveways, and more. And with a 2,200 PSI rating, it's powerful enough to tackle even the toughest jobs. So whether you're a homeowner or a professional cleaner, the DK2 OPW480EV-K is the pressure washer you need to get the job done right.

FEATURES

- Powered by a 57.6V, 1,024Wh, 20Ah, LiFePO4 lithium-ion battery ¹
- Equipped with a 3,500 RPM EV motor
- Comes with 120V AC/DC 200W charger
- 3-piston axial cam pump creates max pressure of 2,200 PSI (150 Bar) and a flow rate of 2.4 GPM (9 LPM)
- 25-foot pressure hose
- Metal lance and gun
- 3 different spray nozzles for various applications
- Never flat tires ²
- Comfortable padded handle for easy mobility ³
- Pressure hose rack and spray nozzle storage slots all in one convenient location below the mobility handle ⁴
- Self-priming attachment to pump from alternative water sources
- Includes 1-year limited DK2 warranty

SPECIFICATION

BATTERY	57.6V Max, 1024Wh, 20Ah LiFePO4
MOTOR	2,000Wh 3,500 RPM cordless brushless EV motor
TORQUE	4.1 ft/lb (5.5 Nm) rated 18.4 ft/lb (25 Nm) peak
CHARGER	120V AC/DC 200W
PUMP	3-piston axial cam
MAX PRESSURE	2,200 PSI (150 Bar)
FLOW RATE	2.4 GPM (9 LPM)
DIMENSIONS	29.5" (L) x 31.5" (W) x 41.3" (H) 74.9 cm (L) x 80 cm (W) x 104.9 cm (H)
WEIGHT	104.6 lb (47.4 kg)
SHIPPING DIMENSIONS	26.8" (L) x 22.1" (W) x 18.5" (H) 68.1 cm (L) x 56.1 cm (W) x 47 cm (H)
SHIPPING WEIGHT	114.6 lb (52 kg)
WARRANTY	1-year limited



ITEM NUMBER

OPE100

29

UPC

827518009291

DESCRIPTION

Boasting a voltage of 57.6V, 20Ah capacity, and 1,024Wh energy output. The ELITE ENERGY™ LiFePO4 Battery offers long-lasting power with a lifespan of 3,000 cycles at 80% charge capacity. Designed for safety, it exhibits superior thermal and chemical stability, making it immune to outgassing, fumes, leaks, and suitable for various environments. Environmentally friendly, the LiFePO4 battery is free from heavy metals, rare earth elements, and toxic materials.

SPECIFICATION

VOLTAGE 51.2V (nominal), 57.6V (max)

BATTERY CAPACITY 1024Wh, 20Ah

BATTERY TYPE LiFePO4

EXPANSION PORT 1 x expansion output

USB-A OUTPUT 1 x 5V, 2.4A

USB-C OUTPUT 1 x 65W PD

CHARGING TEMP 32°F - 122°F (0°C - 50°C)

OPERATING TEMP -40°F - 131°F (-20°C - 55°C)

STORAGE TEMP -40°F - 122°F (-20°C - 50°C)

DIMENSIONS 12.4" (L) x 7.9" (W) x 7.9" (H)
31.5 cm (L) x 20 cm (W) x 20 cm (H)

WEIGHT 21 lb (9.5 kg)

SHIPPING DIMENSIONS 15.4" (L) x 10" (W) x 10.4" (H)
39.1 cm (L) x 25.4 cm (W) x 26.4 cm (H)

SHIPPING WEIGHT 26 lb (11.8 kg)

WARRANTY 1-year limited

FEATURES

- 57.6V, 1024Wh, 20Ah LiFePO4 battery
- FCC Certified
- Recyclable, renewable, and contains no heavy or rare earth metals
- Convenient carrying handle **1**
- Easy-push power button with battery level indicator **2**
- Includes cables with easy-unplug lever **3**
- Can connect with the ELITE ENERGY™ OPECHF 2000W Power Console for 50-minute fast charging capability **4**
- Includes 1-year limited DK2 warranty



2000W POWER CONSOLE

ITEM NUMBER

OPECHF

UPC

827518009307

DESCRIPTION

The ELITE ENERGY™ Power Console is a high-performance and versatile power solution designed to meet your energy needs. With its powerful 2000W output, it delivers reliable and efficient power for your devices and equipment. It is both ETL and FCC certified, ensuring safety and quality. Constructed with recyclable and renewable materials, this console is environmentally conscious and built to last. Its portable design with a carrying handle allows you to take it wherever you go. The console is equipped with an LED light with various settings, and toggles for AC, DC, USB, and wireless charging power providing versatile charging options for different devices. The console also allows for battery expansion with the capability of connecting 3 ELITE ENERGY™ LiFePO4 batteries.

SPECIFICATION

AC INPUT	AC 120V, 60Hz, 15A, 2000W max
AC OUTPUT	2 x AC output ports, 120V, 60Hz, 2000W, Peak 3800W
DC INPUT	1 x XT60 charging port, 10V - 58.4V, 300W max MPPT, for solar or car charging
DC OUTPUT	1 x 12V, 10A
USB-A OUTPUT	1 x 18W QC3.0, 2 x 5V, 2.4A
USB-C OUTPUT	1 x 100W PD, 2 x 5V, 2.4A
WIRELESS CHARGING PAD	1 x 15W max
CHARGING TEMP	32°F - 122°F (0°C - 50°C)
OPERATING TEMP	-40°F - 131°F (-20°C - 55°C)
STORAGE TEMP	-40°F - 122°F (-20°C - 50°C)
DIMENSIONS	12.4" (L) x 7.9" (W) x 6.5" (H) 31.5 cm (L) x 20 cm (W) x 16.5 cm (H)
WEIGHT	7.7 lb (3.5 kg)
SHIPPING DIMENSIONS	15.4" (L) x 10" (W) x 9" (H) 39.1 cm (L) x 25.4 cm (W) x 9" (H)
SHIPPING WEIGHT	7.8 lb (3.5 kg)
WARRANTY	1-year limited



FEATURES

- 2000W output power
- ETL and FCC certified
- Constructed of recyclable and renewable materials
- Charges the ELITE ENERGY™ OPE100 LiFePO4 Battery in under an hour
- Convenient carrying handle **1**
- LED light with various settings
- Toggles for AC, DC, USB, and wireless charging power **2**
- Battery expansion ports to connect up to 3 ELITE ENERGY™ OPE100 LiFePO4 Batteries and create power backup system **3**
- Easily connects to any product that uses DC or AC power
- Easy ON button **4**
- Includes 1-year limited DK2 warranty

100W PORTABLE SOLAR PANEL

ITEM NUMBER

PPS100

31

UPC

827518009383



DESCRIPTION

The ELITE ENERGY™ 100W Portable Solar Panel is the ultimate portable power solution that harnesses the sun's energy. With a peak power of 100W and cell efficiency of up to 23%, this solar panel generates exceptional clean power. It unfolds to a large size, capturing maximum sunlight, yet weighs under 10 pounds for easy transport. Constructed with lightweight materials, it remains durable while being portable. The fold-out stands elevate the panels and precisely aim them at the sun for maximum exposure and energy generation. Embrace the power of solar energy with the ELITE ENERGY™ 100W Folding Solar Panel. Whether camping, hiking, or reducing your carbon footprint, this portable solar panel provides a reliable and eco-friendly solution for charging devices and powering adventures. With high-quality monocrystalline solar cells, it ensures optimal performance and efficiency, even in challenging conditions. Harness the sun's energy and enjoy the convenience of clean power wherever you go.

SPECIFICATION

PEAK POWER	100W
OPEN CIRCUIT VOLTAGE	24V
CELL EFFICIENCY	Up to 23%
SHORT CIRCUIT CURRENT	5.5A
SOLAR CELL	Monocrystalline
VOLTAGE @ MAX POWER (VMP)	20V
CURRENT @ MAX POWER (LMP)	5A
OPERATING TEMPERATURE	-10°C - 65°C
UNFOLDED DIMENSIONS	48.3" (L) x 21.1" (H) 122.8 cm (L) x 53.6 cm (H)
FOLDED DIMENSIONS	21.1" (L) x 23.9" (H) 53.6 cm (L) x 60.8 cm (H)
WEIGHT	9.7 lb (4.4 kg)
SHIPPING WEIGHT	10.1 lb (4.6 kg)
WARRANTY	1-year limited



FEATURES

- Convenient and compact folding design allows for easy storage and setup
- Zip-up compartment for connection components **1**
- Handles for carrying to and from different locations by foot **2**
- Monocrystalline solar cells for optimal performance **3**
- Constructed with lightweight material
- Fold-out stands to keep your panels off the ground and aimed at the sunlight **4**
- Includes 1-year limited DK2 warranty

200W PORTABLE SOLAR PANEL

ITEM NUMBER

PPS200

UPC

827518009390

DESCRIPTION

The ELITE ENERGY™ 200W Portable Solar Panel is the ultimate portable power solution that harnesses the sun's energy. With a peak power of 200W and cell efficiency of up to 23%, this solar panel generates exceptional clean power. It unfolds to a large size, capturing maximum sunlight, yet weighs under 10 pounds for easy transport. Constructed with lightweight materials, it remains durable while being portable. The fold-out stands elevate the panels and precisely aim them at the sun for maximum exposure and energy generation. Embrace the power of solar energy with the ELITE ENERGY™ 200W Folding Solar Panel. Whether camping, hiking, or reducing your carbon footprint, this portable solar panel provides a reliable and eco-friendly solution for charging devices and powering adventures. With high-quality monocrystalline solar cells, it ensures optimal performance and efficiency, even in challenging conditions. Harness the sun's energy and enjoy the convenience of clean power wherever you go.


SPECIFICATION

PEAK POWER	200W
OPEN CIRCUIT VOLTAGE	24V
CELL EFFICIENCY	Up to 23%
SHORT CIRCUIT CURRENT	11A
SOLAR CELL	Monocrystalline
VOLTAGE @ MAX POWER (VMP)	20V
CURRENT @ MAX POWER (LMP)	10A
OPERATING TEMPERATURE	-10°C - 65°C
UNFOLDED DIMENSIONS	83.5" (L) x 23.2" (H) 212.1 cm (L) x 59 cm (H)
FOLDED DIMENSIONS	22" (L) x 23.2" (H) 55.9 cm (L) x 59 cm (H)
WEIGHT	18.2 lb (8.3 kg)
SHIPPING WEIGHT	19 lb (8.6 kg)
WARRANTY	1-year limited



FEATURES

- Convenient and compact folding design allows for easy storage and setup
- Zip-up compartment for connection components **1**
- Handles for carrying to and from different locations by foot **2**
- Monocrystalline solar cells for optimal performance **3**
- Constructed with lightweight material
- Fold-out stands to keep your panels off the ground and aimed at the sunlight **4**
- Includes 1-year limited DK2 warranty

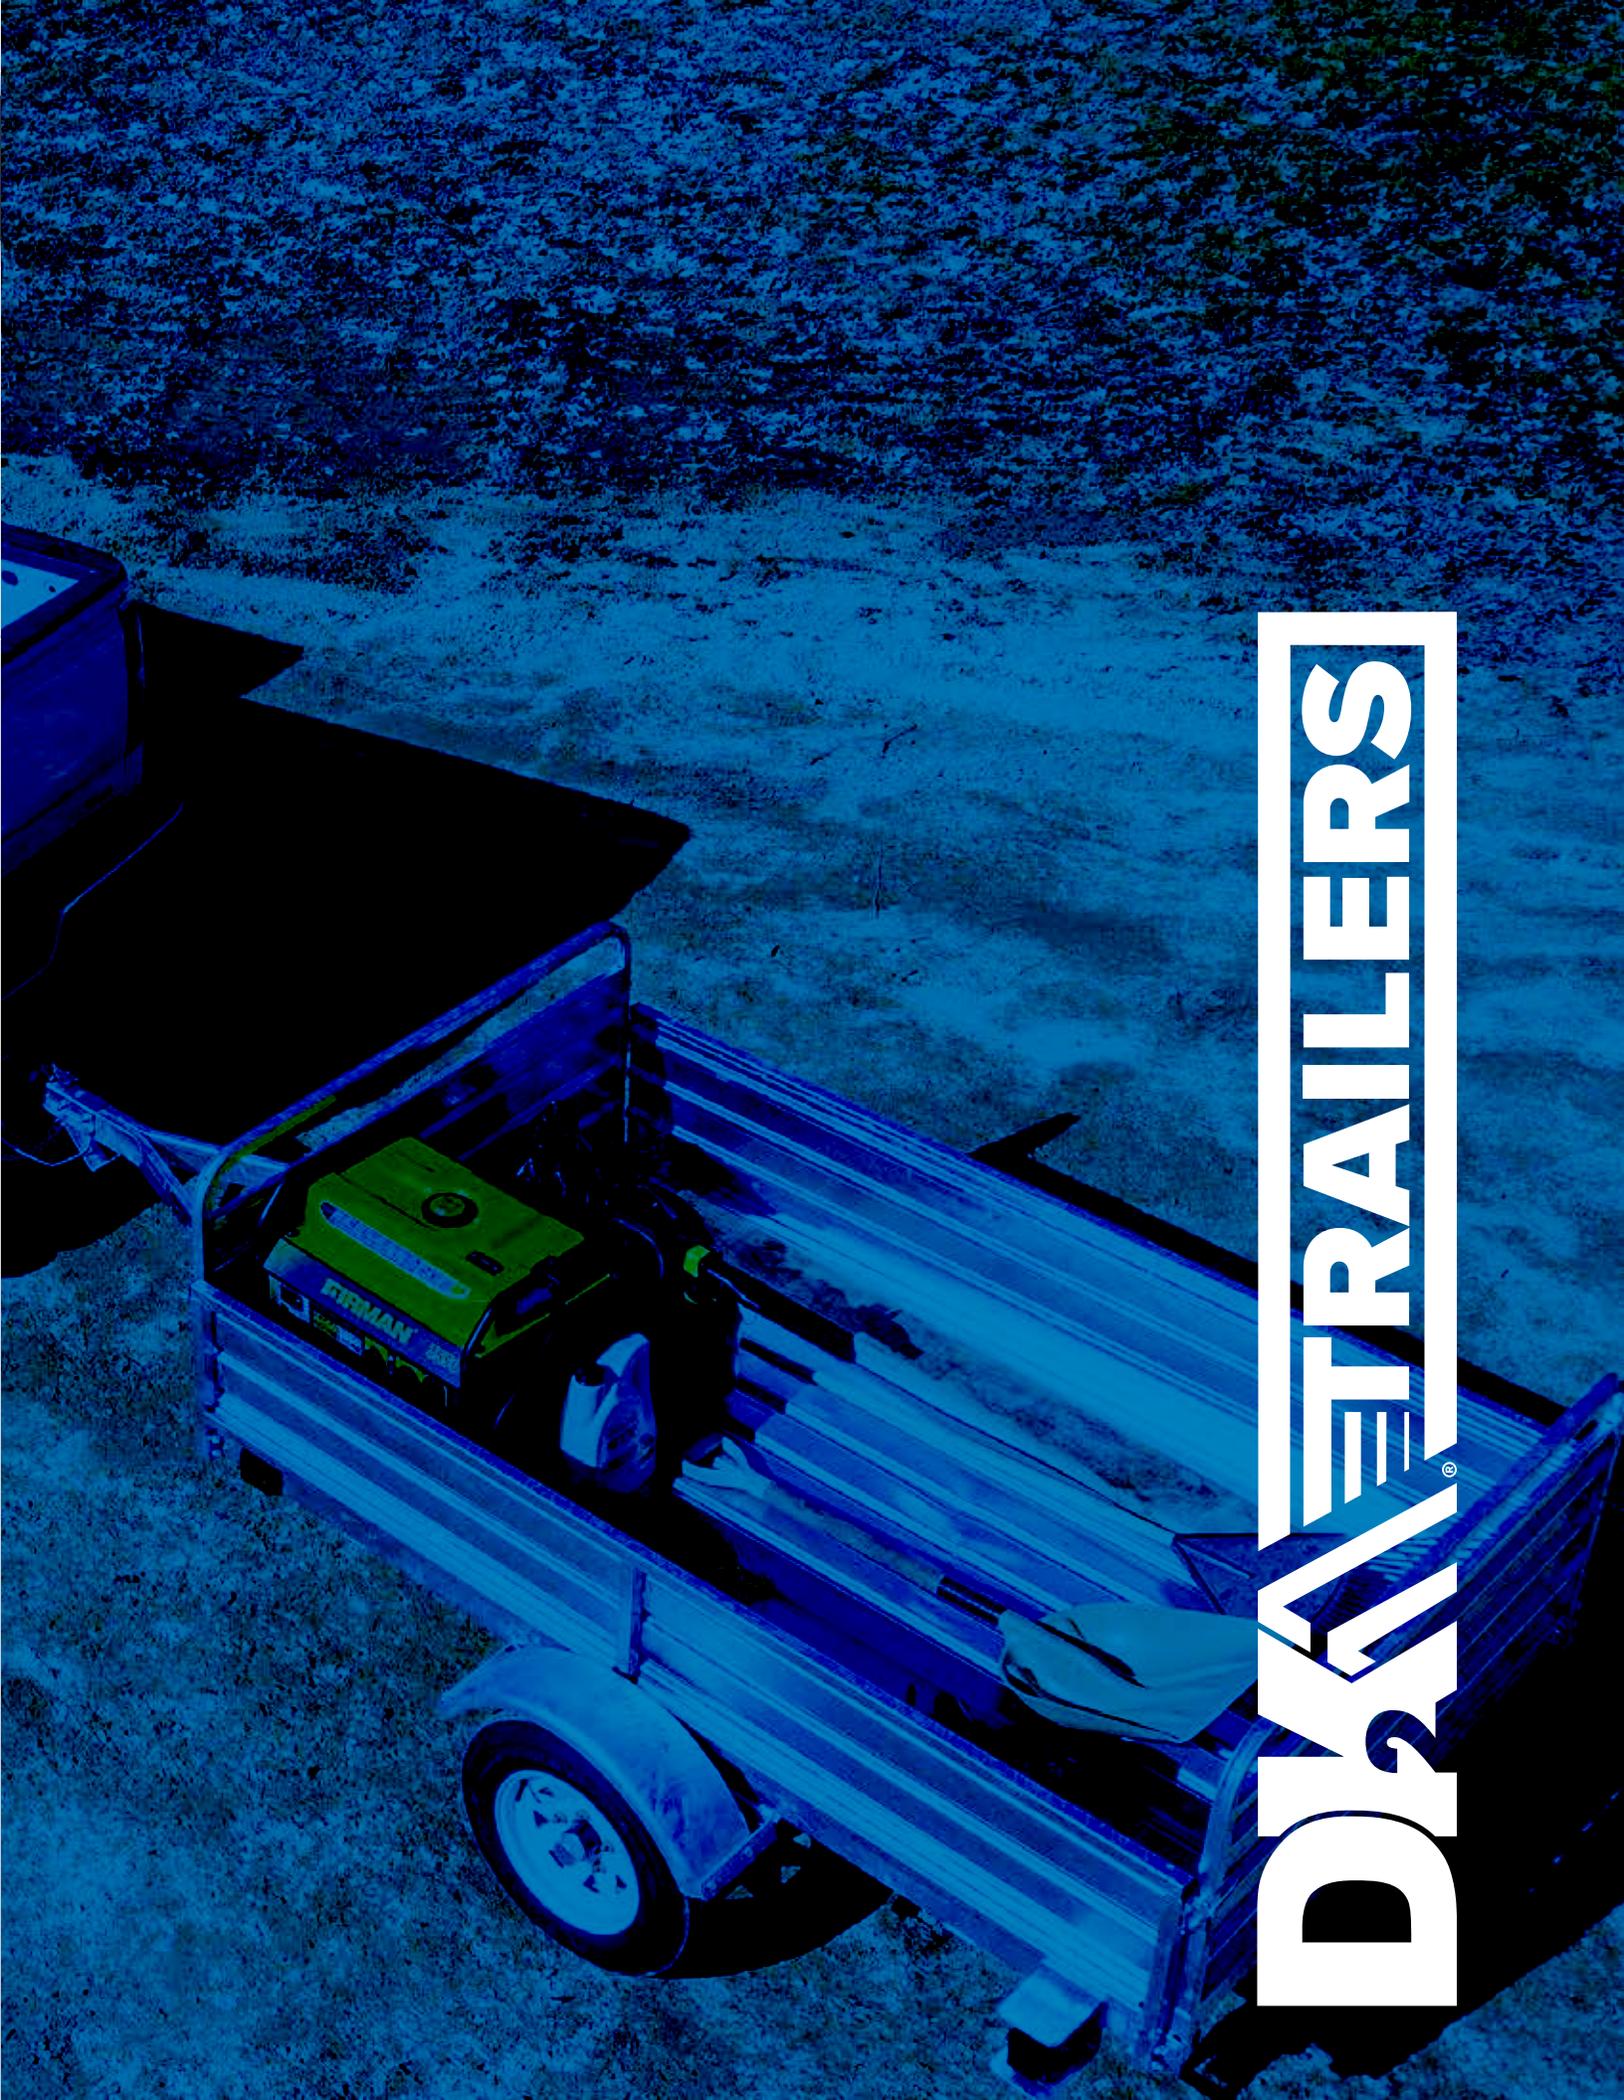

DIAMOND TRAILERS

4FT x 6FT SINGLE AXLE LANDSCAPE TRAILER

34



ITEM NUMBER

MMT4X6

UPC


826518004831

DESCRIPTION

The MMT4X6 is specially designed for handling a variety of hauling tasks; the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded tubular steel with expanded steel decks and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION


PAYLOAD CAPACITY	1,295 lb (587.4 kg)
GVWR	1,581.6 lb (717.4 kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tires on 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Solid steel
GATE	36" (91.4 cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9 cm (L) x 121.9 cm (W)
FLOOR HEIGHT	18" (45.7 cm)
HITCH HEIGHT	14" (35.6 cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1 cm (L) x 162.6 cm (W) x 66 cm (H)
WEIGHT	286.6 lb (130 kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1 cm (L) x 132.1 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	308.6 lb (140 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel **1**
- Corrugated steel floor panel **2**
- 36" (91.4 cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler
- Includes all necessary paperwork for registration

3-IN-1 UTILITY TRAILER

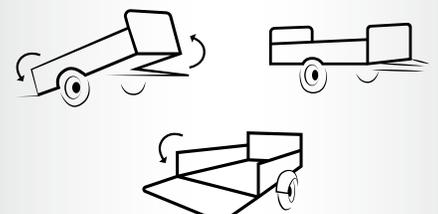

4FT x 6FT SINGLE AXLE OPEN RAIL LANDSCAPE TRAILER

ITEM NUMBER

MMT4X60

35

UPC

826518005623



DESCRIPTION

The MMT4X60 is specially designed for handling a variety of hauling tasks; the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded tubular steel with expanded steel decks and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION


PAYLOAD CAPACITY	1,295 lb (587.4 kg)
GVWR	1,581.6 lb (717.4 kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tires on 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	36" (91.4 cm) square tube steel ramp and round tube steel exterior
RAILS	Open design, tubular steel
GATE	36" (91.4 cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9 cm (L) x 121.9 cm (W)
FLOOR HEIGHT	18" (45.7 cm)
HITCH HEIGHT	14" (35.6 cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1 cm (L) x 162.6 cm (W) x 66 cm (H)
WEIGHT	286.6 lb (130 kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1 cm (L) x 132.1 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	308.6 lb (140 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Tubular steel open rail design ¹
- Corrugated steel floor panel ²
- 36" (91.4 cm) square tube steel ramp and round tube steel exterior ³
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin ⁴
- D.O.T. 4.80-12 bias tires on a 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern ⁵
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler
- Includes all necessary paperwork for registration

3-IN-1 UTILITY TRAILER

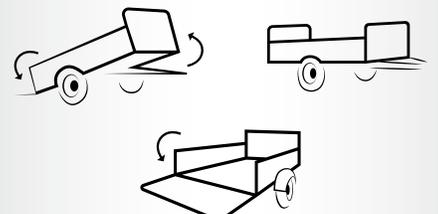

4FT x 6FT SINGLE AXLE OPEN RAIL GALVANIZED LANDSCAPE TRAILER

36



ITEM NUMBER

MMT4X6OG

UPC

827518008119

DESCRIPTION

The MMT4X6OG is specially designed for handling a variety of hauling tasks; the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded hot-dipped galvanized tubular steel with expanded steel decks and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION


PAYLOAD CAPACITY	1,295 lb (587.4 kg)
GVWR	1,581.6 lb (717.4 kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tires on 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
RAILS	Open design, tubular steel
GATE	36" (91.4 cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9 cm (L) x 121.9 cm (W)
FLOOR HEIGHT	18" (45.7 cm)
HITCH HEIGHT	14" (35.6 cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1 cm (L) x 162.6 cm (W) x 66 cm (H)
WEIGHT	286.6 lb (130 kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1 cm (L) x 132.1 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	308.6 lb (140 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Tubular steel open rail design **1**
- Corrugated steel floor panel **2**
- 36" (91.4 cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5 cm) rim with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler
- Includes all necessary paperwork for registration

3-IN-1 UTILITY TRAILER

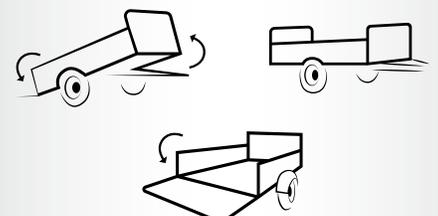

4FT x 8FT SINGLE AXLE FOLDING UTILITY TRAILER

ITEM NUMBER

MFT4X8

37

UPC

827518007150

DESCRIPTION

The trailer you've always needed has arrived with the DK2 MFT4X8 folding trailer kit. High-performing, durable and versatile, this trailer is ready for work. Built with a patented welded steel frame and deck for added strength and easy assembly, you'll spend less time reading manuals and more time on the road. The DK2 MFT4X8 is coated with high-performance anti-slip textured UV powder, all while maintaining its complete folding functionality. When it comes to trailers – there's truly nothing like it.

SPECIFICATION


PAYLOAD CAPACITY	1,450 lb (657.7 kg)
GVWR	1,787.3 lb (810.7 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply tire, 80 PSI (5.5 Bar) cold
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
RAILS	Open design, tubular steel (sold separately)
FLOORING	Solid steel, anti-slip textured UV powder coated steel
LIGHTING	Pre-wired, Quick-connect D.O.T LED with flat 4-wire harness and connector
BED DIMENSIONS	96" (L) x 48" (W) 243.8 cm (L) x 121.9 cm (W)
DIMENSIONS	135" (L) x 62.3" (W) x 20" (H) 342.9 cm (L) x 158.2 cm (W) x 50.8 cm (H)
WEIGHT	337.3 lb (153 kg)
SHIPPING DIMENSIONS	48.4" (L) x 62.2" (W) x 7.9" (H) 122.9 cm (L) x 158 cm (W) x 20.1 cm (H)
SHIPPING WEIGHT	368.2 lb (167 kg)
WARRANTY	1-year limited



FEATURES

- Folding design to fit into compact spaces vertically **1**
- Constructed with fully welded heavy-duty UV powder coated tubular steel
- Solid steel bed with high-performance anti-slip textured UV powder coating **2**
- 5.30-12 6-ply tires **3**
- Trolley wheels for easy stowaway transport while folded **4**
- Pre-wired quick-connect D.O.T. LED lighting with flat 4-wire harness and connector
- 2" (5.08 cm) coupler with safety chain and S-hook
- 8 stake holes for the MFT4X8RK fully welded tubular steel open rail kit **(sold separately)** **5**
- Includes all necessary paperwork for registration

FOLDING DESIGN

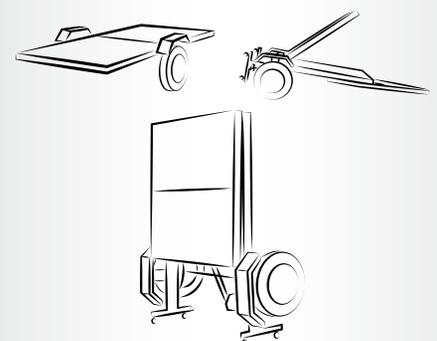

4FT x 8FT SINGLE AXLE GALVANIZED FOLDING UTILITY TRAILER

38



ITEM NUMBER

MFT4X8G

UPC

827518009482

DESCRIPTION

The trailer you've always needed has arrived with the DK2 MFT4X8G folding trailer kit. High-performing, durable and versatile, this trailer is ready for work. Built with a patented welded steel frame and deck for added strength and easy assembly, you'll spend less time reading manuals and more time on the road. The DK2 MFT4X8G is coated with high-performance hot-dipped galvanized steel, all while maintaining its complete folding functionality. When it comes to trailers – there's truly nothing like it.

SPECIFICATION


PAYLOAD CAPACITY	1,450 lb (657.7 kg)
GVWR	1,787.3 lb (810.7 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply tire, 80 PSI (5.5 Bar) cold
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
RAILS	Open design, tubular steel (sold separately)
FLOORING	Solid steel, anti-slip textured
LIGHTING	Pre-wired, Quick-connect D.O.T LED with flat 4-wire harness and connector
BED DIMENSIONS	96" (L) x 48" (W) 243.8 cm (L) x 121.9 cm (W)
DIMENSIONS	135" (L) x 62.3" (W) x 20" (H) 342.9 cm (L) x 158.2 cm (W) x 50.8 cm (H)
WEIGHT	337.3 lb (153 kg)
SHIPPING DIMENSIONS	48.4" (L) x 62.2" (W) x 7.9" (H) 122.9 cm (L) x 158 cm (W) x 20.1 cm (H)
SHIPPING WEIGHT	368.2 lb (167 kg)
WARRANTY	1-year limited



FEATURES

- Folding design to fit into compact spaces vertically **1**
- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Solid galvanized steel bed **2**
- 5.30-12 6-ply tires **3**
- Trolley wheels for easy stowaway transport while folded **4**
- Pre-wired quick-connect D.O.T. LED lighting with flat 4-wire harness and connector
- 2" (5.08 cm) coupler with safety chain and S-hook
- 8 stake holes for the MFT4X8RK fully welded tubular steel open rail kit **(sold separately)** **5**
- Includes all necessary paperwork for registration

FOLDING DESIGN

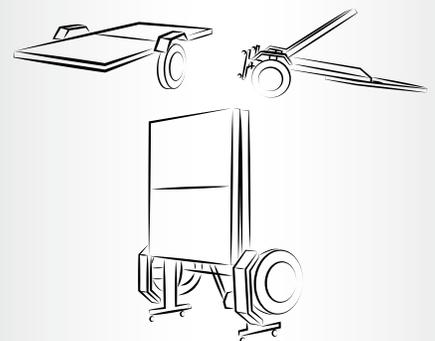

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY TRAILER

ITEM NUMBER

MMT5X7

39

UPC

826518003391

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. When the front and back load-bearing gates are down, the trailer bed extends to nearly 12 feet in length, and the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION


PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,073 lb (940.3 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
DROP GATES	24" (61 cm) load-bearing corrugated reinforced steel
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	434.3 lb (197 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	458.6 lb (208 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 24" (61 cm) load-bearing corrugated steel drop gates, extending the length of the trailer to 11.3 ft (3.4 m) **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

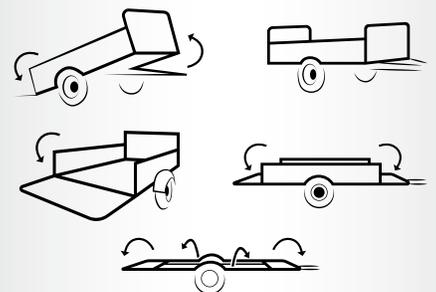

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY TRAILER WITH DRIVE-UP GATE

ITEM NUMBER

MMT5X7-DUG


UPC

826518005296

FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 40" (101.6 cm) expanded mesh and tubular steel rear ramp gate **3**
- 24" (61 cm) load-bearing corrugated steel front drop gate
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

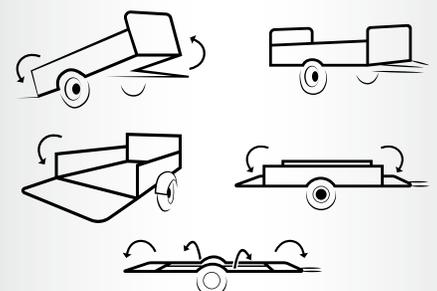

40

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. The MMT5X7-DUG comes with a 24-inch front load-bearing gate and a 40-inch rear drive-up gate, and a tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION

PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,143.9 lb (972.5 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
GATES	40" (101.6 cm) expanded mesh and tubular steel rear ramp gate and 24" (61 cm) load-bearing corrugated reinforced steel front gate
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	504.9 lb (229 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	537.9 lb (244 kg)
WARRANTY	1-year limited



4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY GALVANIZED TRAILER

ITEM NUMBER

MMT5X7G

41

UPC

826518003391

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. When the front and back load-bearing gates are down, the trailer bed extends to nearly 12 feet in length, and the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION


PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,073 lb (940.3 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
DROP GATES	24" (61 cm) load-bearing corrugated reinforced steel
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	434.3 lb (197 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	458.6 lb (208 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 24" (61 cm) load-bearing corrugated steel drop gates, extending the length of the trailer to 11.3 ft (3.4 m) **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

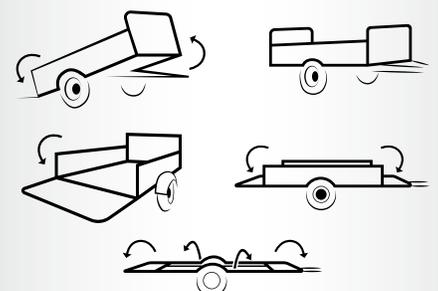

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY GALVANIZED TRAILER WITH DRIVE-UP GATE

42



ITEM NUMBER

MMT5X7G-DUG

UPC

826518005302

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. Equipped with a 24-inch front load-bearing gate and a 40-inch rear drive-up gate, and a tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% hot-dipped galvanized steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION


PAYLOAD CAPACITY	1,639 lb (743.4 kg)
GVWR	2,143.9 lb (972.5 kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply bias tires with 5 x 4.5" (11.4 cm) bolt pattern
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
SIDE PANELS	Corrugated reinforced steel
GATES	40" (101.6 cm) expanded mesh and tubular steel rear ramp gate and 24" (61 cm) load-bearing corrugated reinforced steel front gate
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5 cm (L) x 132.1 cm (W)
FLOOR HEIGHT	20" (50.8 cm)
HITCH HEIGHT	16" (40.6 cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6 cm (L) x 165.1 cm (W) x 91.4 cm (H)
WEIGHT	504.9 lb (229 kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5 cm (L) x 139.7 cm (W) x 22.9 cm (H)
SHIPPING WEIGHT	537.9 lb (244 kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 40" (101.6 cm) expanded mesh and tubular steel rear ramp gate **3**
- 24" (61 cm) load-bearing corrugated steel front drop gate
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 bias tires with 5 x 4.5" (11.4 cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08 cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

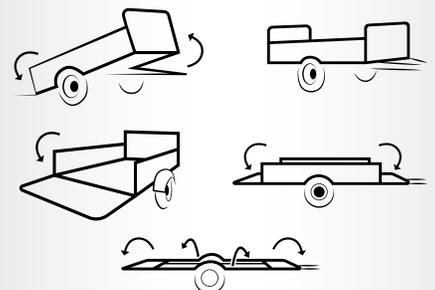

6FT x 10FT SINGLE AXLE OPEN RAIL UTILITY TRAILER

ITEM NUMBER

MMT6X10

43

UPC

826518005593



DESCRIPTION

Introducing the new MMT6X10 single axle open rail utility trailer, the largest in DK2's collection. Constructed with fully welded heavy-duty powder-coated tubular steel with a corrugated steel panel floor, you can count on this trailer to deliver long lasting reliability for all your hauling needs. It has a payload capacity of 1,950 pounds and sits on a solid square tube cambered axle equipped with D.O.T. 14-inch 175/80R14 tires. Load and unload this trailer with ease using the included 48-inch drive-up gate.

SPECIFICATION

PAYLOAD CAPACITY	1,950lb (884.5kg)
GVWR	2,590lb (1,174.8kg)
WHEELS & TIRES	14" (35.6cm) D.O.T. 175/80R14 bias tires
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Open design, tubular steel
GATE	49.3" (125.2cm) tubular and expanded mesh steel ramp
FLOORING	Corrugated reinforced steel panels
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	120" (L) x 72" (W) 304.8cm (L) x 182.9cm (W)
FLOOR HEIGHT	20.2" (51.3cm)
HITCH HEIGHT	18.2" (46.2cm)
DIMENSIONS	166.1" (L) x 83.9" (W) x 71.1" (H) 421.9cm (L) x 213.1cm (W) x 180.6cm (H)
WEIGHT	640lb (290.3kg)
SHIPPING DIMENSIONS	83.1" (L) x 74" (W) x 10.2" (H) 211.1cm (L) x 188cm (W) x 25.9cm (H)
SHIPPING WEIGHT	650.4lb (295kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Tubular steel open rail design **2**
- 49.3" (125.2cm) tubular and expanded mesh steel rear ramp gate **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- 14" (35.6cm) D.O.T. 175/80R14 bias tires **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

1100 LB POLY ATV TRAILER

ITEM NUMBER

MMTATV

UPC

827518009499

FEATURES

- Constructed with high-quality poly and steel **1**
- Easily transport heavy loads with the 1,100 lb carrying capacity
- Take your trailer wherever you need to go with its 18" tires, providing excellent traction and stability **2**
- The 11.8" hitch height and 16.5" trailer to ground clearance make it easy to attach to your lawn tractor or ATV **3**
- The large bucket ensures plenty of space to transport equipment or material around the job site **4**
- Includes 1-year limited DK2 warranty

44



DESCRIPTION

Looking for a durable ATV trailer that can handle any terrain? Look no further than the MMTATV 1100 lb ATV Trailer. With a massive capacity of 1100lbs, you can easily transport heavy loads wherever you need to go. Made from high-quality poly and steel frame, this trailer is built to last.

The 18-inch tires provide excellent traction and stability, while the 11.8-inch hitch height and 16.5-inch trailer to ground clearance make it easy to attach to your lawn tractor or ATV. The large bucket on this trailer ensures that you have plenty of space to transport your equipment or material.

With the MMTATV 1100 lb ATV Trailer, you can transport your equipment with ease and get the job done.

SPECIFICATION

PAYLOAD CAPACITY 1,100 lb (499 kg)

TIRES 18" (45.7 cm)

MATERIAL High-quality poly bucket and steel frame

DUMP BED 2-position with quick-release pin

BALL/COUPLER SIZE 2" (5.08 cm)

DIMENSIONS 64.2" (L) x 46.3" (W) x 29.3" (H)
163 cm (L) x 117.5 cm (W) x 74.5 cm (H)

WEIGHT 103.6 lb (47 kg)

SHIPPING DIMENSIONS 50" (L) x 33.1" (W) x 12.6" (H)
127 cm (L) x 84 cm (W) x 32 cm (H)

WARRANTY 1-year limited





CURRAHEE TRAILERS

MADE FOR THE WORKING MAN SINCE 1988



SINGLE AXLE DELUXE LANDSCAPE TRAILER

46



ITEM NUMBERS

L508 / L510 / L610 / L612 / L614

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 2" A-frame coupler **2**
- D.O.T. approved LED lighting
- 4-way plug
- 3" channel tongue
- New 205/75R15 radial tires **3**
- A-frame tongue jack
- 2,990lb GVWR
- 3" x 2" x 3/16" angle main rail
- 3,500lb EZ lube idler axle
- Safety chains
- 12" tall angle top rail
- Taillight protectors
- Heavy-duty 4' landscape gate **4**
- Fenders with backings



MODEL	DIMENSIONS	WEIGHT
L508	5' x 8'	680lb
L510	5' x 10'	720lb
L610	76" x 10'	840lb
L612	76" x 12'	960lb
L614	76" x 14'	980lb

**SINGLE AXLE
LANDSCAPE TRAILER
WITH SIDE GATE**

ITEM NUMBERS

L612SG

47

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 2" A-frame coupler **2**
- D.O.T. LED lighting 4-way plug
- 3" channel tongue
- New 205/75R15 radial tires **3**
- A-frame tongue jack
- 2,990lb GVWR
- 3" x 2" x 3/16" angle main rail
- 3,500lb EZ lube idler axle
- Safety chains
- 12" tall angle top rail
- Taillight protectors
- Heavy-duty 4' landscape gate **4**
- Fenders with backings



MODEL

DIMENSIONS

WEIGHT

L612SG

76" x 12'

1,060lb

SINGLE AXLE LANDSCAPE TRAILER WITH HIGH SIDES

48



ITEM NUMBERS

L508HS / L510HS / L610HS /
L612HS

FEATURES

- 24" expanded metal sides **1**
- D.O.T. approved LED lighting
- 3" channel tongue **2**
- A-frame tongue jack
- 3" x 2" x 3/16" angle main rail
- 2" x 2" x 3/16" angle cross members
- 2" x 8" pressure treated wood floor **3**
- Heavy-duty 4' landscape gate
- 2" A-frame coupler
- 4-way plug
- New 205/75R15 radial tires **4**
- 2,990lb GVWR
- 3,500lb idler axle
- Safety chains
- Taillight protectors
- Fenders with backings



MODEL	DIMENSIONS	WEIGHT
L508HS	5' x 8'	700lb
L510HS	5' x 10'	820lb
L610HS	76" x 10'	940lb
L612HS	76" x 12'	1,150lb

SINGLE AXLE LIGHT-DUTY UTILITY TRAILER

ITEM NUMBERS

L508.13 / L510.13

49

FEATURES

- 24" expanded metal sides **1**
- D.O.T. approved LED lighting
- 3" channel tongue **2**
- A-frame tongue jack
- 3" x 2" x 3/16" angle main rail
- 2" x 2" x 3/16" angle cross members
- 2" x 8" pressure treated wood floor **3**
- Heavy-duty 4' landscape gate
- 2" A-frame coupler
- 4-way plug
- New 205/75R15 radial tires **4**
- 2,990lb GVWR
- 3,500lb idler axle
- Safety chains
- Taillight protectors
- Fenders with backings



MODEL	DIMENSIONS	WEIGHT
L508.13	5' x 8'	500lb
L510.13	5' x 10'	540lb

TANDEM AXLE LIGHT-DUTY LANDSCAPE TRAILER

50



ITEM NUMBERS

LD612NB

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 4' heavy-duty landscape gate **2**
- 2" A-frame coupler **3**
- A-frame tongue jack
- 2,990 GVWR
- D.O.T approved LED lighting
- 4-way plug
- Fenders with backing
- 3" x 2" x 3/16" angle main rail
- 3" x 2" x 3/16" angle cross members
- 4" channel tongue
- 14" tall angle top rail
- 2 x 3,500lb idler axles
- New 205/75R15 radial tires **4**
- White spoke wheels
- Safety chains



MODEL	DIMENSIONS	WEIGHT
LD612NB	76" x 12'	1,300lb

TANDEM AXLE LANDSCAPE TRAILER

ITEM NUMBERS

LD612 / LD614 / LD616 / LD620

51

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 2 x 5/16" A-frame coupler **2**
- 4' heavy-duty landscape gate **3**
- A-frame tongue jack
- Teardrop fenders with backing
- 7,000lb GVWR
- Breakaway kit
- Safety chains
- 3" x 2" x 3/16" angle cross members
- 14" tall angle top rail
- 3" x 2" x 3/16" angle frame
- D.O.T. approved LED lighting
- 7-way plug
- New 205/75R15 radial tires **4**
- White spoke wheels



MODEL	DIMENSIONS	WEIGHT
LD612	76" x 12'	1,420lb
LD614	76" x 14'	1,560lb
LD616	76" x 16'	1,600lb
LD620	76" x 20'	1,820lb

7K TANDEM AXLE EQUIPMENT TRAILER

52



ITEM NUMBERS

E716.7K / E718.7K

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 7,000lb GVWR
- 2 x 3,500lb brake axles
- 2 x 5/16" A-frame coupler **2**
- A-frame tongue jack
- Teardrop fenders with backing
- Breakaway kit
- Standard loops/stake pockets
- White spoke wheels
- 5" channel main rail
- 3" channel cross members on 24" center
- 3" channel ramps 64" length **3**
- D.O.T. approved LED lighting
- Shockproof LED taillights
- Taillight protectors
- 7-way plug
- New 205/75R15 radial tires **4**
- Safety chains



MODEL	DIMENSIONS	WEIGHT
E716.7K	82" x 16'	1,820lb
E718.7K	82" x 18'	1,940lb

7K TANDEM AXLE DELUXE EQUIPMENT TRAILER

ITEM NUMBERS

E716.7KD / E718.7KD

53

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 7,000lb GVWR
- 2 x 3,500lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb drop foot jack
- Diamond plate fenders with backing
- New 205/75R15 radial tires **3**
- Taillight protectors
- Safety chains
- 5" channel main rail
- 3" channel cross members on 24" center
- 3" channel flip-up ramps 64" length **4**
- Dovetail
- Breakaway kit
- D.O.T. approved LED lighting
- Shockproof LED taillights
- 7-way plug
- Standard loops/stake pockets



MODEL	DIMENSIONS	WEIGHT
E716.7KD	82" x 16'	1,820lb
E718.7KD	82" x 18'	1,940lb

10K TANDEM AXLE EQUIPMENT TRAILER

54



ITEM NUMBERS

E716.10K / E718.10K / E720.10K

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 9,800lb GVWR
- 2 x 5,200lb brake axles
- 2 x 5/16" A-frame coupler **2**
- A-frame tongue jack
- New 225/75R15 radial tires **3**
- 6-lug white spoke wheels
- Teardrop fenders with backing
- 6" channel main rail
- 3" channel cross members on 24" center
- 3" channel flip-up ramps 64" length **4**
- D.O.T. approved LED lighting
- 7-way plug
- Breakaway kit
- Standard loops/stake pockets
- Safety chains



MODEL	DIMENSIONS	WEIGHT
E716.10K	82" x 16'	2,100lb
E718.10K	82" x 18'	2,200lb
E720.10K	82" x 20'	2,500lb

10K TANDEM AXLE DELUXE EQUIPMENT TRAILER

ITEM NUMBERS

E716.10KD / E718.10KD / E720.10KD

55

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 9,800lb GVWR
- 2 x 5,200lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Shockproof LED lights
- Taillight protectors
- 7-way plug
- Breakaway kit
- 6" channel main rail
- 3" channel cross members on 24" center
- 3" channel flip-up ramps 5' length **3**
- Dovetail
- New 225/75R15 radial tires **4**
- 6-lug white spoke wheels
- Diamond plate fenders with backing
- Standard loops/stake pockets
- Safety chains



MODEL	DIMENSIONS	WEIGHT
E716.10KD	82" x 16'	2,100lb
E718.10KD	82" x 18'	2,200lb
E720.10KD	82" x 20'	2,350lb

12K TANDEM AXLE DELUXE EQUIPMENT TRAILER

56




ITEM NUMBERS

E716.12KD / E718.12KD / E720.12KD

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 12,000lb GVWR
- 2 x 6,000lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Diamond plate fenders with backing
- Dovetail
- Standard loops/stake pockets
- New 235/80R16 radial tires **3**
- 8-lug wheels
- 6" channel main rail
- 3" channel cross members on 24" center
- Channel flip-up ramps 5' length **4**
- D.O.T. approved LED lighting
- Grommet mounted LED lights
- Taillight protectors
- 7-way plug
- Breakaway kit
- Tag bracket
- Safety chains

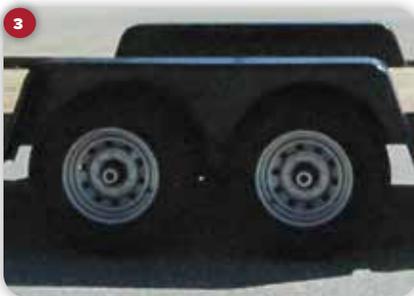

MODEL	DIMENSIONS	WEIGHT
E716.12KD	82" x 16'	2,140lb
E718.12KD	82" x 18'	2,140lb
E720.12KD	82" x 20'	2,400lb

12K TANDEM AXLE DECK OVER TRAILER

ITEM NUMBERS

E820.12K / E824.12K

57

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 12,000lb GVWR
- 2 x 6,000lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Standard loops/stake pockets
- New 235/80R16 radial tires **3**
- 8-lug wheels
- Standard loops/stake pockets
- 6" channel main rail
- 3" channel cross members on 24" center
- D.O.T. approved LED lighting
- 7-way plug
- Breakaway kit
- Taillight protectors
- Tag bracket
- Safety chains



MODEL	DIMENSIONS	WEIGHT
E820.12K	96" x 20'	3,150lb
E824.12K	96" x 24'	3,640lb

12K TANDEM AXLE DECK OVER TRAILER WITH EQUIPMENT PACKAGE

58



ITEM NUMBERS

E820.12KD / E824.12KD

FEATURES

- 2" x 8" pressure treated wood floor **1**
- 12,000lb GVWR
- 2 x 6,000lb brake axles
- 2 x 5/16" adjustable coupler **2**
- 7,000lb dropfoot jack
- Standard loops/stake pockets
- New 235/80R16 radial tires **3**
- 8-lug wheels
- Standard loops/stake pockets
- 6" channel main rail
- 3" channel cross members on 24" center
- 4' dovetail
- D.O.T. approved LED lighting
- Shockproof LED taillights
- 7-way plug
- Breakaway kit
- Taillight protectors
- Tag bracket
- Safety chains
- Corrosion resistant polyurethane paint



MODEL	DIMENSIONS	WEIGHT
E820.12KD	96" x 20'	3,150lb
E824.12KD	96" x 24'	3,640lb

7K TANDEM AXLE CAR HAULER TRAILER

ITEM NUMBERS

C716 / C718

59


FEATURES

- 2" x 8" pressure treated wood floor **1**
- 7,000lb GVWR
- 2 x 3,500lb brake axles
- 2 x 5/16" A-frame coupler **2**
- A-frame tongue jack
- Fenders with backing
- New 205/75R15 radial tires **3**
- White spoke wheels
- Taillight protectors
- 5" x 3" x 1/4" angle main rail
- 3" x 2" x 3/16" angle cross members
- 5' rear slide-in ramps **4**
- Standard loops/stake pockets
- D.O.T. approved LED lighting
- 7-way plug
- Breakaway kit
- Tag bracket
- Safety chains



MODEL	DIMENSIONS	WEIGHT
C716	82" x 16'	1,600lb
C718	82" x 18'	1,820lb

DKA[®] SNOWS

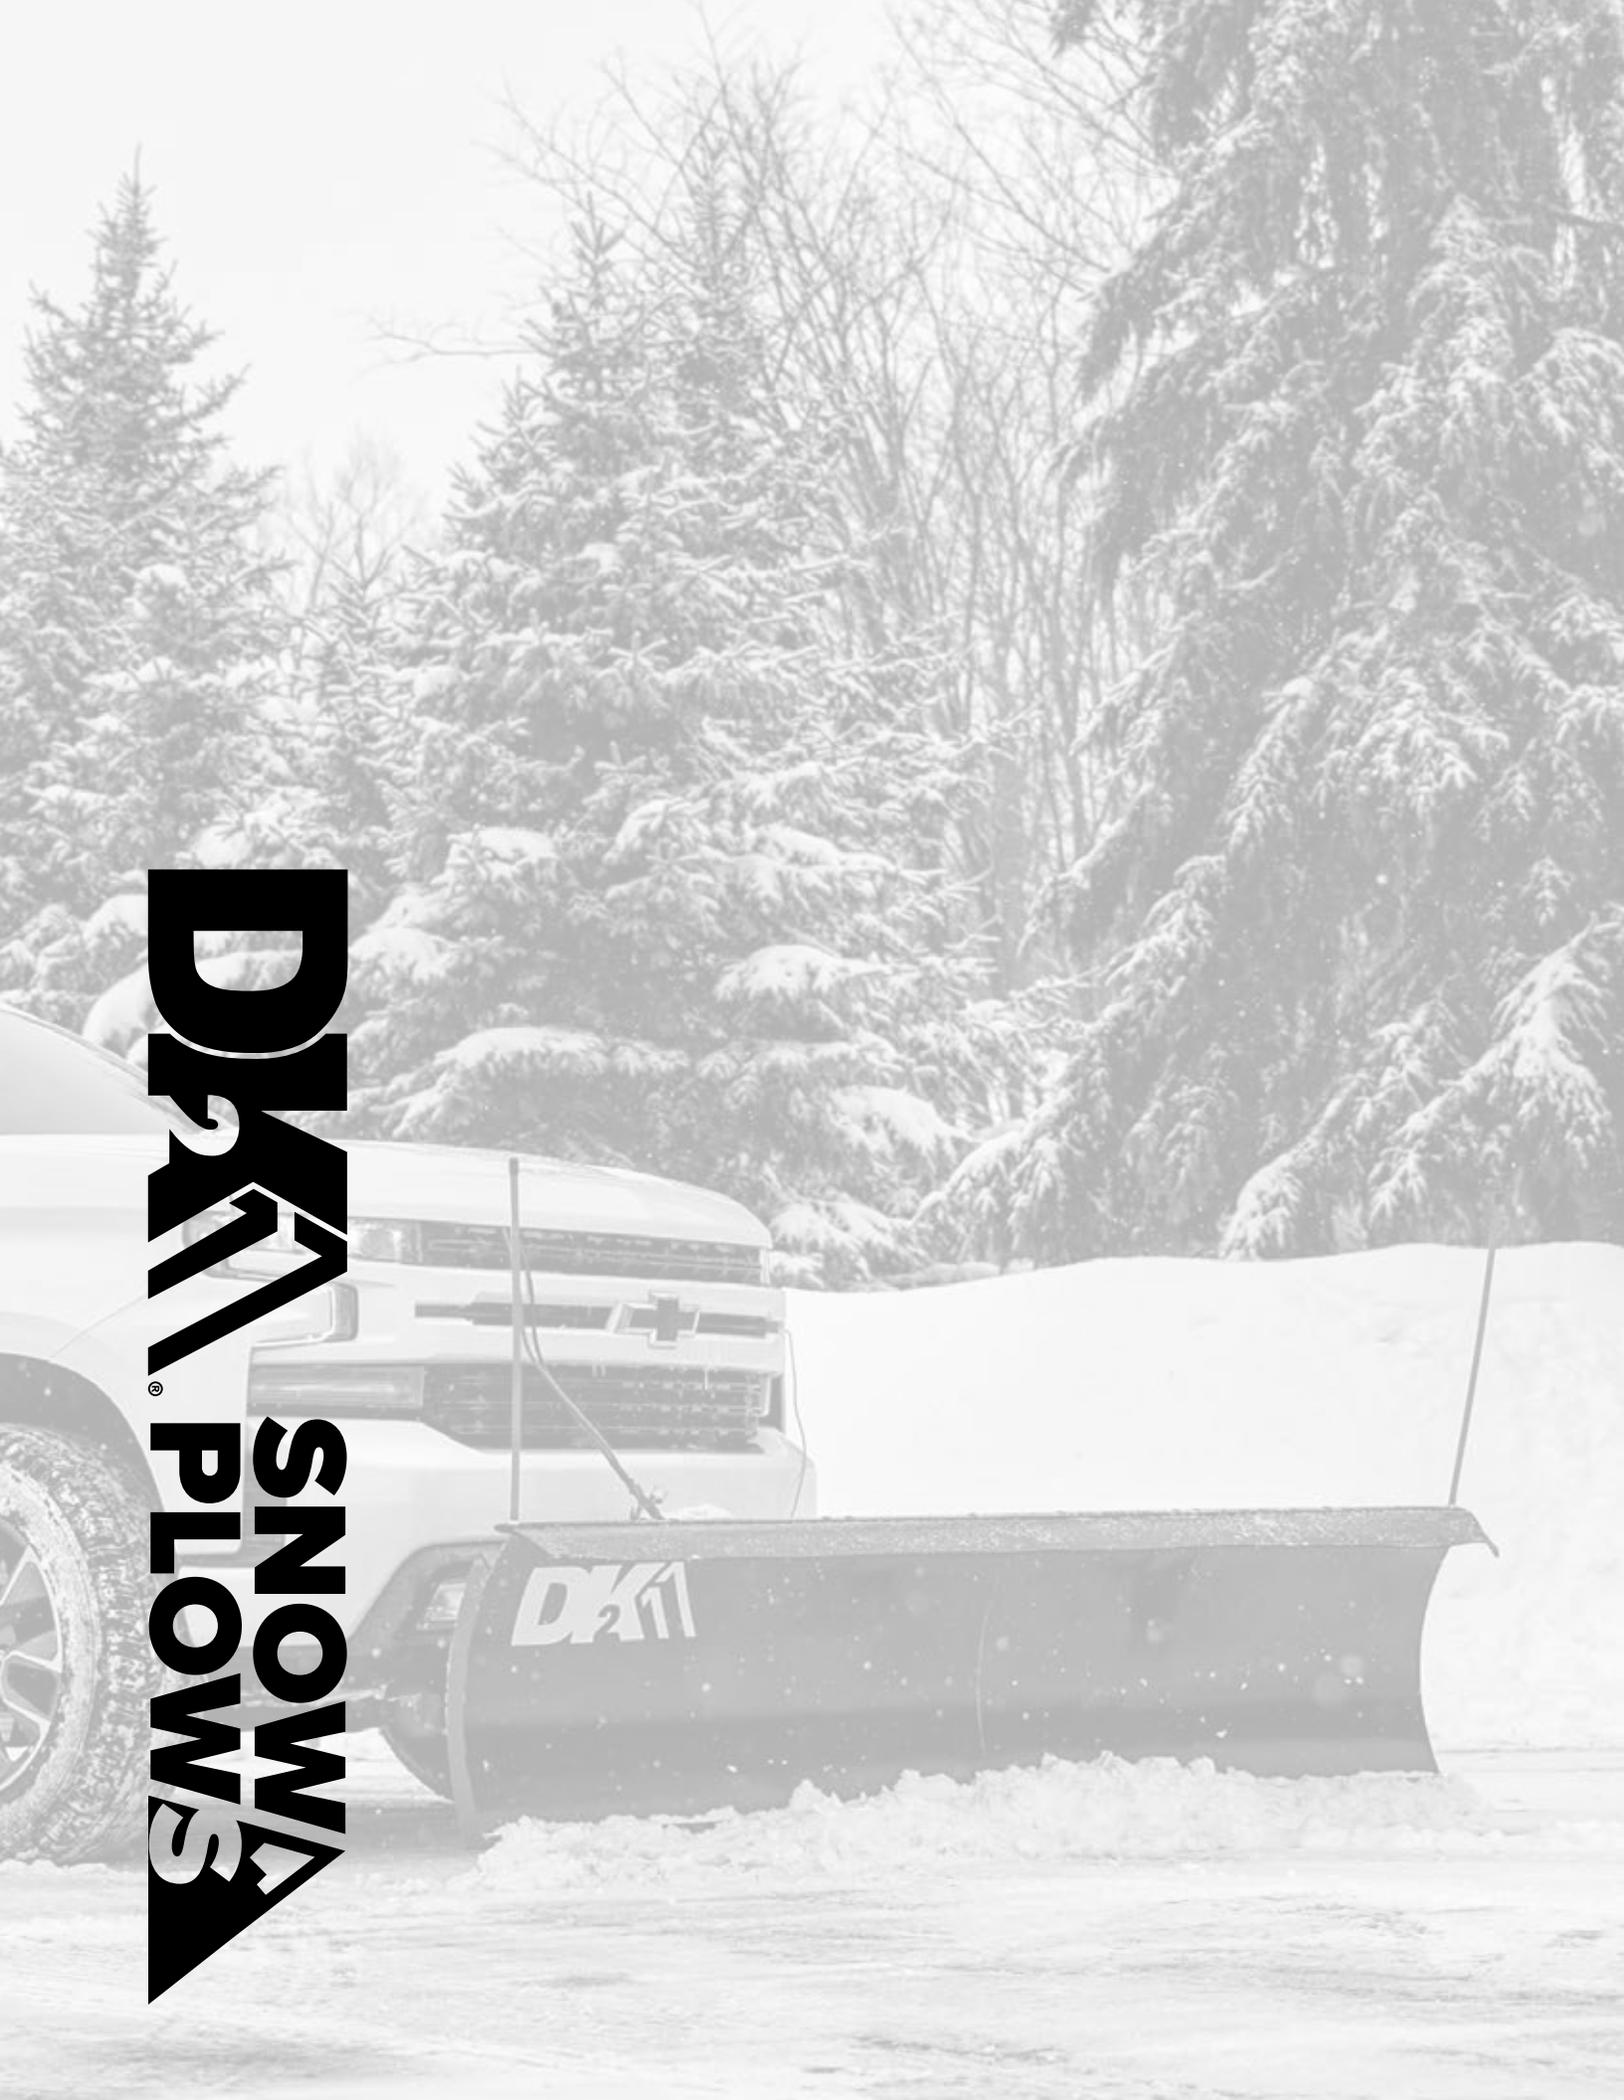

HITCH-MOUNTED SNOW PLOW

ITEM NUMBER / UPC

AVAL8219 / 826518004992
 AVAL8422 / 826518005005
 AVAL8826 / 826518005708



DESCRIPTION

The DK2 Universal T-Frame Mounted Snow Plows allow you to quickly and effectively remove snow from your driveway or small parking lot. These plows simply slide into a 2" front mount receiver for easy removal and storage.

Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch. Each plow kit will also include a set of blade stiffeners for added strength by creating a 3 point connection.

SPECIFICATION

ITEM NUMBER	AVAL8219
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	288 lb (130.6 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	AVAL8422
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	296 lb (134.3 kg)
SHIPPING DIMENSIONS	44" (L) x 32" (W) x 18" (H) 111.8 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	AVAL8826
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	341 lb (154.7 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



- ### FEATURES
- Fits most light trucks and SUV's
 - Easy to mount - simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage **1**
 - An electric winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control **2**
 - Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
 - Powder coated all-steel with UV protected paint **3**
 - Wireless remote control included with the kit **4**
 - Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
 - Each snow plow kit also includes a set of blade stiffeners for added strength
 - ISO 9001 certified manufacturer
 - 1-year limited warranty

HITCH-MOUNTED ELITE SNOW PLOW

62



DESCRIPTION

The DK2 Universal T-Frame Mounted ELITE Series Snow Plows allow you to quickly and effectively remove snow from your driveway or small parking lot. These plows simply slide into a 2" front mount receiver for easy removal and storage. Each snow plow ships complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit, and a wireless electric actuator for extra strength and reliability. Each plow kit will also include a set of blade stiffeners for added strength by creating a 3 point connection.

SPECIFICATION

ITEM NUMBER	AVAL8219ELT
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	321 lb (145 kg)
SHIPPING DIMENSIONS	46" (L) x 36" (W) x 18" (H) 116.8 cm (L) x 91.4 cm (W) x 45.7 cm (H)
ITEM NUMBER	AVAL8422ELT
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	334 lb (151.5 kg)
SHIPPING DIMENSIONS	44" (L) x 32" (W) x 18" (H) 111.8 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	AVAL8826ELT
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	341 lb (154.7 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



FEATURES

- Fits most light trucks and SUV's
- Easy to mount - simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage **1**
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control with built-in clutch, a strong chain, and uses less amperage than the winch, built with a completely sealed gearbox and housing and IP67 dust and water rated **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1-year limited warranty
- Ships in a single carton on a standard size pallet



DESCRIPTION

All DK2 Snow Plows allow you to quickly & effectively remove snow from your driveway or small parking lot. DK2's range of personal plows each mount on to a vehicle specific custom mounting brackets.

Ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch.

SPECIFICATION

ITEM NUMBER	RAMPAGE II • RAMP8219
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	280 lb (127 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	STORM II • STOR8422
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	287 lb (130.2 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	SUMMIT II • SUMM8826
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	301 lb (136.5 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds **1**
- Slide out and roll away for storage
- A wireless winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- ISO 9001 certified manufacturer
- 1-year limited warranty
- Ships in a single carton on a standard size pallet



DESCRIPTION

DK2's line of personal snow plows just got better! The DK2 ELITE Series Snow Plow line up takes its simple yet effective design and improves on it with a wireless actuator for ultimate reliability.

DK2's ELITE Series each mount on to a vehicle specific custom mounting brackets. Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a wireless electric actuator kit.

SPECIFICATION

ITEM NUMBER	RAMPAGE II ELITE • RAMP8219ELT
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3 cm (W) x 48.3 cm (H)
ASSEMBLED WEIGHT	265 lb (120.2 kg)
SHIPPING WEIGHT	280 lb (127 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	STORM II ELITE • STOR8422ELT
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	283 lb (128.4 kg)
SHIPPING WEIGHT	287 lb (130.2 kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2 cm (L) x 81.3 cm (W) x 45.7 cm (H)
ITEM NUMBER	SUMMIT II ELITE • SUMM8826ELT
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5 cm (W) x 66 cm (H)
ASSEMBLED WEIGHT	296 lb (134.3 kg)
SHIPPING WEIGHT	301 lb (136.5 kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8 cm (L) x 88.9 cm (W) x 43.2 cm (H)



ITEM NUMBER / UPC

RAMP8219ELT / 826518005326
 STOR8422ELT / 826518005333
 SUMM8826ELT / 826518004916

FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds **1**
- Slide out and roll away for storage
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control with built-in clutch, a strong chain, and uses less amperage than the winch, built with a completely sealed gearbox and housing and IP67 dust and water rated **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1-year limited warranty
- Ships in a single carton on a standard size pallet


ITEM NUMBER

EVST9022

65
UPC

826518005579

DESCRIPTION

DK2 is proud to bring you the ultimate snow plow solution in our line up - the DK2 Everest. This prosumer, fully hydraulic snow plow kit provides you the opportunity to clear your parking lot, driveway, or lane way whenever required. With our fully hydraulic system you can raise, lower, and angle the snow plow blade from inside your vehicle using our wired hand held remote. For extreme durability against the elements and rust, DK2 combines an industrial powder-coated paint finish on the blade with hot dipped galvanized hardware components to keep your plow looking new for years.

The plow itself simply clips to a DK2 custom fitted vehicle mounting system and can pretty much mount to anything that's fit to push snow.

SPECIFICATION

ITEM NUMBER	EVEREST - EVST9022
BLADE DIMENSIONS	88" (W) x 22" (H) 223.5 cm (W) x 55.9 cm (H)
ASSEMBLED WEIGHT	425 lb (192.8 kg)
SHIPPING WEIGHT	450 lb (204.1 kg)
SHIPPING DIMENSIONS	48" (L) x 42" (W) x 40" (H) 121.9 cm (L) x 106.7 cm (W) x 101.6 cm (H)
CONSTRUCTION	Steel tube and sheet
COLOR/FINISH	Black industrial powder-coated blade skin and all other components
LIFT SYSTEM	Hydraulic
ANGLING SYSTEM	Hydraulic, multiple positions
CONTROL SYSTEM	Wired remote control to lift, lower and angle left or right
VEHICLE MOUNTING SYSTEM	Custom bolt-on mounting brackets *Sold separately
SCRAPER BLADE	Powder-coated steel, replaceable
INCLUDED	Snow deflector, skid shoes


FEATURES

- Ships partially assembled (mount & wiring required)
- Simple bolt on custom fitted mounting brackets, no drilling or welding required (sold separately) **1**
- Hydraulic system lifts and lowers blade **2**
- Light weight, no need to alter stock suspension
- Black UV powder coated components with an industrial painted blade skin **3**
- Self-leveling foot provides max blade tip clearance when the blade is fully raised
- Skid shoes to assist guiding the blade edge over uneven terrain or from possibly marking those more delicate driveways
- Snow deflector to assist directing snow forward and also minimizing windshield spray
- Wired hand held control **4**
- Blade hardware holds the hydraulic pump so it can be rolled away from the vehicle rather than being left on the truck with the mount
- Thicker trip springs to ensure tension remains strong and coils tight for optimal performance when encountering obstacles
- Existing holes in plow frame make it easy to add bolt-on accessories
- Bolt-on accessories and upgrades available

DKW ACCESSORIES



TRUNK MOUNTED ALUMINUM 3-BIKE CARRIER

ITEM NUMBER

BCR190

67

UPC

827518007129

DESCRIPTION

Just because you don't have a receiver hitch on your vehicle doesn't mean you can't take your bikes with you. The DK2 BCR190 can be strapped to the trunk of a car or small SUV using its heavy-duty durable nylon straps and haul up to 3 bikes without damaging the paint or body of the vehicle using the carrier's foam frame pads.

This bicycle carrier is adjustable for most makes and model of vehicles and easy to assemble. Soft rubber cradles and straps allow you to secure the bikes to the carrier without damaging the finish or performance of the bicycles, and the lightweight aluminum construction allows for easy installation or removal to/from the vehicle.

SPECIFICATION

PAYLOAD CAPACITY	70 lb (31.8 kg) (2 bikes) 81 lb (36.7 kg) (3 bikes)
MATERIAL	UV and temperature resistant lightweight aluminum
MOUNTING STRAPS	Heavy-duty durable nylon
CRADLES	Soft rubber
CRADLE STRAPS	Adjustable rubber
COMPATIBILITY	Mountain bikes and road bikes
MOUNT STYLE	Trunk-mounted
DIMENSIONS	29" (L) x 18" (W) x 29" (H) 73.7 cm (L) x 45.7 cm (W) x 73.7 cm (H)
WEIGHT	8 lb (3.6 kg)
SHIPPING DIMENSIONS	19.5" (L) x 34" (W) x 6" (H) 48.3 cm (L) x 86.4 cm (W) x 15.2 cm (H)
SHIPPING WEIGHT	11 lb (5 kg)
WARRANTY	1-year limited



FEATURES

- UV and extreme temperature resistant lightweight aluminum construction **1**
- Mounts to the trunk of most cars or small SUV's with heavy-duty durable nylon mounting straps **2**
- Carries up to three bicycles with 2 rubber cradles and adjustable straps per bicycle **3**
- Folding adjusters to fold the rack away when not in use **4**
- Foam frame pads to prevent vehicle scratching **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH MOUNTED 4-BIKE CARRIER

ITEM NUMBER

BCR290

UPC

827518007136

68



DESCRIPTION

The DK2 BCR290 hitch-mounted bike carrier is the perfect way to transport bikes for long road trips.

Quick and easy assembly takes only minutes and this carrier is constructed with UV power-coated steel to resist damage from harsh weather conditions.

Simply slide the bike carrier into your 2-inch receiver hitch and secure using the anti-wobble hitch pin. No-mark straps allow you to secure up to 4 bicycles to your carrier for transportation, and when out of use, the carrier tilts away for easy access to the rear of the mounted-vehicle.

SPECIFICATION

PAYLOAD CAPACITY	200 lb (90.7 kg) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
CRADLES	Soft rubber
CRADLE STRAPS	Adjustable rubber
COMPATIBILITY	Mountain bikes and road bikes
MOUNT STYLE	2" (5.08 cm) hitch-mounted (Class III or IV receiver recommended)
DIMENSIONS	35" (L) x 12" (W) x 35" (H) 88.9 cm (L) x 30.5 cm (W) x 88.9 cm (H)
WEIGHT	20 lb (9.1 kg)
SHIPPING DIMENSIONS	22.5" (L) x 14" (W) x 3.75" (H) 57.2 cm (L) x 35.6 cm (W) x 9.5 cm (H)
SHIPPING WEIGHT	23.2 lb (10.5 kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 2" (5.08cm) hitch receiver and carries up to 200lb (90.7kg) with a class III or IV receiver **2**
- Carries up to four bicycles with 2 rubber cradles **3** and adjustable straps **4** per bicycle
- Folding adjusters to fold the rack away when not in use for easy rear-vehicle access **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH-MOUNTED 2-BIKE PLATFORM CARRIER

ITEM NUMBER

BCR590

69

UPC

827518007112

DESCRIPTION

The DK2 BCR590 hitch-mounted platform bike carrier fits into either a 1.25-inch or 2-inch receiver hitch and allows for the easy transportation of two bicycles totalling up to 80 pounds by securing them to carrier.

The BCR590 adjusts in width and height to fit your bike while making sure the no-mark straps don't damage the finish of the mounted bike. This carrier folds up when not in use and the center arm folds down to allow access to the rear of the vehicle without removing the rack.

Lightweight and easy to assemble, the BCR590 is the perfect solution for those long road trips.

SPECIFICATION

PAYLOAD CAPACITY	80 lb (36.3 kg) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
FRAME CRADLES	Steel with no-mark padding and height adjustability
WHEEL CRADLES	Steel with length adjustability
WHEEL CRADLE STRAPS	Adjustable rubber
COMPATIBILITY	Mountain bikes and road bikes
MOUNT STYLE	1.25" (3.18 cm) / 2" (5.08 cm) hitch-mounted (Class III or IV receiver recommended)
DIMENSIONS	53" (L) x 39" (W) x 20" (H) 134.6 cm (L) x 99.1 cm (W) x 50.8 cm (H)
WEIGHT	28 lb (12.7 kg)
SHIPPING DIMENSIONS	40" (L) x 10.5" (W) x 5.5" (H) 101.6 cm (L) x 26.7 cm (W) x 14 cm (H)
SHIPPING WEIGHT	30 lb (13.6 kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 1.25" (3.18cm) or 2" (5.08cm) hitch receiver and carries up to 80lb (36.3kg) with a class III or IV receiver **2**
- Carries up to two bicycles with 2 length-adjustable steel wheel cradles with adjustable rubber straps **3** and height-adjustable, no-mark frame cradles **4** per bicycle
- Folding adjusters to fold the rack away when not in use **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH-MOUNTED E-BIKE PLATFORM HAULER

ITEM NUMBER

BCR690E

UPC

827518008003

70




DESCRIPTION

Built to conveniently load two bikes of any size with its large wheel cradles, convenient rear wheel stubber straps, and padded universal frame cradles, you and a friend or family member can ride off-road, in the city, or wherever your journey takes you with the BCR690E E-bike hauler.

With effortless loading capabilities, a revolutionary pivot feature that gives you access to your tailgate or hatchback, and easy mounting with its 2-inch hitch compatibility, your only concern will be where to go next.

SPECIFICATION

PAYLOAD CAPACITY	72.3 lb (32.8 kg) (1 bike) 144.6 lb (65.6 kg) (2 bikes) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
FRAME CRADLES	Steel with no-mark padding and height adjustability
FRONT WHEEL CRADLES	Large, heavy-duty poly
REAR WHEEL CRADLES	Length-adjustable, heavy-duty poly with adjustable rubber straps
COMPATIBILITY	E-bikes, fat tire bikes, mountain bikes, and road bikes
MOUNT STYLE	2" (5.08 cm) hitch-mounted (Class III or IV receiver recommended)
DIMENSIONS	61.8" (L) x 43.3" (W) x 33" (H) 157 cm (L) x 110 cm (W) x 83.8 cm (H)
WEIGHT	44 lb (20 kg)
SHIPPING DIMENSIONS	53.5" (L) x 12.2" (W) x 9.8" (H) 135.9 cm (L) x 31 cm (W) x 24.9 cm (H)
SHIPPING WEIGHT	52 lb (23.6 kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 2" (5.08cm) hitch receiver and carries up to 144.6lb (65.6kg) with a class III or IV receiver **2**
- Large, heavy-duty poly front wheel cradles **3**
- Height-adjustable, no-mark padded frame cradles **4**
- Length-adjustable, heavy-duty poly rear wheel cradles with adjustable rubber straps **5**
- Folding adjusters to fold the rack away when not in use **6**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HEAVY DUTY HITCH-MOUNTED E-BIKE PLATFORM HAULER

ITEM NUMBER

BCR790E

71

UPC

827518009468



DESCRIPTION

Built to conveniently load two bikes of any size with its large wheel cradles, convenient rear wheel stubber straps, and padded universal frame cradles, you and a friend or family member can ride off-road, in the city, or wherever your journey takes you with the BCR790E Heavy Duty E-bike hauler.

With effortless loading capabilities, a revolutionary pivot feature that gives you access to your tailgate or hatchback, integrated bike ramp for easy loading its 2-inch hitch compatibility, your only concern will be where to go next.

SPECIFICATION

PAYLOAD CAPACITY	77 lb (35 kg) (1 bike)
	154 lb (70 kg) (2 bikes) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
FRONT WHEEL CRADLES	Large, heavy-duty poly
REAR WHEEL CRADLES	Length-adjustable, heavy-duty poly with adjustable rubber straps
TIRE SIZE COMPATIBILITY	15.9" to 28.9" (40.6 cm to 73.6 cm)
MAX TIRE WIDTH	4.7" (12.1 cm)
COMPATIBILITY	E-bikes, fat tire bikes, mountain bikes, and road bikes
MOUNT STYLE	2" (5.08 cm) hitch-mounted (Class III or IV receiver recommended)
FOLDED DIMENSIONS	58.6" (L) x 17.8" (W) x 32.3" (H)
	148.8 cm (L) x 45.2 cm (W) x 82.1 cm (H)
UNFOLDED DIMENSIONS	58.6" (L) x 41.8" (W) x 38.2" (H)
	148.8 cm (L) x 106.2 cm (W) x 97.1 cm (H)
WEIGHT	61.7 lb (28 kg)
SHIPPING DIMENSIONS	55.1" (L) x 18.1" (W) x 9.8" (H)
	140 cm (L) x 46 cm (W) x 25 cm (H)
SHIPPING WEIGHT	68.3 lb (31 kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 2" (5.08cm) hitch receiver and carries 1 bike up to 77 lb (35 kg) or 2 bikes up to 154 lb (70 kg) with a class III or IV receiver **2**
- Carries up to two bicycles with 2 length-adjustable steel wheel cradles with adjustable rubber straps **3** and height-adjustable frame cradles
- Easy tilt control handle, just pull and lift when not in use **4**
- Integrated removable bike ramp for easy loading and unloading **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**

HITCH-MOUNTED STEEL CARGO CARRIER

ITEM NUMBER

HCC602

UPC

827518001165

72



DESCRIPTION

The DK2 hitch-mounted black powder coated steel cargo carrier allows you to immediately increase the cargo capacity of your vehicle so you can haul bulky, messy items like luggage, coolers or firewood.

This carrier has a 500 pound payload capacity (with a Class III or IV hitch receiver) and flips up against your vehicle when not in use.



FEATURES

- Heavy duty UV powder-coated tubular and expanded mesh steel construction
- Mounts to any 2" (5.08cm) hitch receiver **1**
- Flips up when not in use and stows against the rear of the vehicle **2**
- Carries up to 500lb (226.8kg) dependent on receiver strength (recommended Class III or IV)
- 3 rear reflective markers for additional road safety **3**
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**

SPECIFICATION

PAYLOAD CAPACITY 500 lb (226.8 kg)
(with class III or IV hitch receiver)

MATERIAL Heavy-duty UV powder-coated tubular and expanded mesh steel

MOUNT STYLE Hitch-mounted

DIMENSIONS 60" (L) x 20" (W) x 6.5" (H)
152.4 cm (L) x 50.8 cm (W) x 16.5 cm (H)

WEIGHT 47 lb (21.3 kg)

SHIPPING DIMENSIONS 33" (L) x 22" (W) x 10" (H)
83.8 cm (L) x 55.9 cm (W) x 25.4 cm (H)

SHIPPING WEIGHT 51 lb (23.1 kg)

WARRANTY Limited 1-year



HITCH-MOUNTED ALUMINUM CARGO CARRIER

ITEM NUMBER

HCC502A

73

UPC

826518005050



DESCRIPTION

The DK2 hitch-mounted aluminum cargo carrier allows you to immediately increase the cargo capacity of your vehicle so you can haul bulky, messy items like luggage, coolers or firewood.

This carrier has a 500 pound payload capacity (with a Class III or IV hitch receiver) and flips up against your vehicle when not in use.



FEATURES

- Durable and lightweight aluminum construction
- Mounts to any 2" (5.08cm) hitch receiver **1**
- Flips up when not in use and stows against the rear of the vehicle **2**
- Carries up to 500lb (226.8kg) dependent on receiver strength (recommended Class III or IV receiver)
- Includes threaded anti-wobble hitch pin for added stability
- 11 rear reflective markers for additional road safety **3**
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**

SPECIFICATION

PAYLOAD CAPACITY 500 lb (226.8 kg)
(with class III or IV hitch receiver)

MATERIAL Lightweight aluminum, formed steel hitch and hitch bracket, carbon steel hardware, thermoplastic end caps

MOUNT STYLE Hitch-mounted

DIMENSIONS 49.5" (L) x 22.25" (W) x 6.5" (H)
125.7 cm (L) x 56.5 cm (W) x 16.5 cm (H)

WEIGHT 29 lb (13.2 kg)

SHIPPING DIMENSIONS 50" (L) x 24" (W) x 4" (H)
127 cm (L) x 61 cm (W) x 10.2 cm (H)

SHIPPING WEIGHT 32 lb (14.5 kg)

WARRANTY Limited 1-year

1

2

3



HITCH-MOUNTED MOTORCYCLE CARRIER

ITEM NUMBER

TMC201

UPC

693495970561

74



DESCRIPTION

For someone who doesn't want the hassles associated with towing a trailer, the hitch-mounted motorcycle carrier is the perfect option for you.

Since this carrier utilizes our patent-pending WedgeLock™ mounting system, it is rock solid and will keep your bike stable and secure. Now you can transport your bike with confidence and ease. This carrier works equally great with motorcycles, motocross & dual purpose bikes, scooters and mopeds.

SPECIFICATION

MATERIAL	UV powder coated steel
MOUNT STYLE	Hitch-mounted
DIMENSIONS	55" (L) x 21" (W) x 7" (H) 139.7 cm (L) x 53.3 cm (W) x 17.8 cm (H)
WEIGHT	86 lb (39 kg)
SHIPPING DIMENSIONS	56" (L) x 21" (W) x 7" (H) 142.2 cm (L) x 53.3 cm (W) x 17.8 cm (H)
SHIPPING WEIGHT	89 lb (40.4 kg)
WARRANTY	Limited 1-year

VEHICLE HITCH MANUFACTURER RATING	MAXIMUM CARRYING CAPACITY
300 lb (136.1 kg)	180 lb (81.6 kg)
350 lb (158.8 kg)	225 lb (102.1 kg)
500 lb (226.8 kg)	350 lb (158.8 kg)
750 lb (340.2 kg)	500 lb (226.8 kg)



FEATURES

- Extremely versatile, secure and stable: patent-pending design results in a snug anti-wobble fit
- Tilts down for easy loading and unloading **1**
- Easily installed and removed - no extra tools required
- Ideally suited for SUVs or pickup trucks
- Features adjustable front wheel channel to accommodate different sized bikes **2**
- Retractable tie-down bar
- Safety chains and hitch pin included
- Fits any standard 2 inch class III or IV hitch receiver (weight capacity dependent on receiver strength) **3**
- UV-Powder coated steel construction
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**





WWW.DKZ.COM

DKZ 

WWW.DKZ.COM

DKZ 

DKZ 
DKZ

TWIN CYLINDER 1HP 2-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC02G

UPC

827518008805

FEATURES

- Powered by a twin cylinder 1 HP (750W) 120V brushless electric motor **1**
- Holds up to 2 gal (7.6 L) of compressed air at 125 PSI (8.6 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports **2**
- 2 clear analog pressure gauges **3**
- Regulator dial to control the amount of air pressure released at the hose outlets **4**
- Compact, lightweight design with ergonomic handle for easy mobility **5**
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

DESCRIPTION

The AC02G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 125 PSI with 2 gallons of available compressed air, all at a whisper quiet sound level.

This unit comes equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools are given the air pressure they need to operate at their full potential, and when it comes to moving the AC02G around the job site, it couldn't be any easier with its lightweight, compact design and ergonomic lift handle.

When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.

SPECIFICATION

POWER 550W/0.75 HP / 750W/1.0 HP

VOLTAGE 110V / 120V

FREQUENCY 60Hz

SPEED 1,700 RPM

DISPLACEMENT 3.8 CFM / 4.0 CFM

CAPACITY 2 gal (7.6 L)

MAX PRESSURE 125 PSI (8.6 Bar)

DIMENSIONS 17.3" (L) x 15.8" (W) x 13.9" (H)
44 cm (L) x 40.1 cm (W) x 35.3 cm (H)

WEIGHT 43 lb (19.5 kg)

SHIPPING DIMENSIONS 18.9" (L) x 16.9" (W) x 15.6" (H)
48 cm (L) x 43 cm (W) x 39.5 cm (H)

SHIPPING WEIGHT 46.3 lb (21 kg)

WARRANTY 1-year limited



TWIN CYLINDER 1HP 4-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC04G

77

UPC

827518008799

DESCRIPTION


The AC04G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 125 PSI with 4 gallons of available compressed air, all at a whisper quiet sound level.

This unit comes equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools are given the air pressure they need to operate at their full potential, and when it comes to moving the AC04G around the job site, it couldn't be any easier with its lightweight, compact design and ergonomic lift handle.

When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.

SPECIFICATION

POWER	550W/0.75 HP / 750W/1.0 HP
VOLTAGE	110V / 120V
FREQUENCY	60Hz
SPEED	1,700 RPM
DISPLACEMENT	3.8 CFM / 4.0 CFM
CAPACITY	4 gal (15.1 L)
MAX PRESSURE	125 PSI (8.6 Bar)
DIMENSIONS	17.4" (L) x 15.6" (W) x 20.8" (H) 44.2 cm (L) x 39.6 cm (W) x 52.8 cm (H)
WEIGHT	54 lb (24.5 kg)
SHIPPING DIMENSIONS	18.7" (L) x 16.5" (W) x 22.4" (H) 47.5 cm (L) x 41.9 cm (W) x 56.9 cm (H)
SHIPPING WEIGHT	57.3 lb (26 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a twin cylinder 1 HP (750W) 120V brushless electric motor ¹
- Holds up to 4 gal (15.1 L) of compressed air at 125 PSI (8.6 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports ²
- 2 clear analog pressure gauges ³
- Regulator dial to control the amount of air pressure released at the hose outlets ⁴
- Compact, lightweight design with ergonomic handle for easy mobility ⁵
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

TWIN CYLINDER 2HP 10-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC10G

UPC

827518008775

FEATURES

- Powered by a twin cylinder 2 HP (1491.4W) 120V AC brushless electric motor ¹
- Holds up to 10gal (37.9 L) of compressed air at 150 PSI (10.3 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports ²
- 2 clear analog pressure gauges ³
- Regulator dial to control the amount of air pressure released at the hose outlets ⁴
- Ergonomic handle ⁵
- Never flat Ø8" (Ø20.3 cm) OD x 1.75" (4.4 cm) tires for easy mobility ⁶
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

78



DESCRIPTION

The AC10G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 150 PSI with 10 gallons of available compressed air, all at a whisper quiet sound level. Equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools operate at full potential, and when it comes to moving the AC10G around the job site, it couldn't be any easier with its ergonomic lift handle and never flat wheels and tires. When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.



SPECIFICATION

POWER	1491.4W / 2 HP
VOLTAGE	120V AC
FREQUENCY	60Hz
SPEED	1,700 RPM
DISPLACEMENT	4.5 CFM (90 PSI / 6.2 Bar) 5.5 CFM (40 PSI / 2.8 Bar)
TANK	Vertical
CAPACITY	10 gal (37.9 L)
MAX PRESSURE	150 PSI (10.3 Bar)
DIMENSIONS	19.5" (L) x 16" (W) x 32.5" (H) 49.5 cm (L) x 40.6 cm (W) x 82.6 cm (H)
WEIGHT	88.2 lb (40 kg)
SHIPPING DIMENSIONS	20" (L) x 19" (W) x 36.3" (H) 50.8 cm (L) x 48.3 cm (W) x 92.2 cm (H)
SHIPPING WEIGHT	97 lb (44 kg)
WARRANTY	1-year limited

TWIN CYLINDER 2HP 20-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC20G

79

UPC

827518008782

DESCRIPTION

The AC20G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 150 PSI with 20 gallons of available compressed air, all at a whisper quiet sound level. Equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools operate at full potential, and when it comes to moving the AC20G around the job site, it couldn't be any easier with its ergonomic lift handle and never flat wheels and tires. When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.

SPECIFICATION

POWER	1491.4W / 2 HP
VOLTAGE	120V AC
FREQUENCY	60Hz
SPEED	1,700 RPM
DISPLACEMENT	4.5 CFM (90 PSI / 6.2 Bar) 5.5 CFM (40 PSI / 2.8 Bar)
TANK	Vertical ASME Certified
CAPACITY	20 gal (75.7 L)
MAX PRESSURE	150 PSI (10.3 Bar)
DIMENSIONS	19.5" (L) x 16" (W) x 44.5" (H) 49.5 cm (L) x 40.6 cm (W) x 113 cm (H)
WEIGHT	106.9 lb (48.5 kg)
SHIPPING DIMENSIONS	20" (L) x 18.3" (W) x 47.3" (H) 50.8 cm (L) x 46.5 cm (W) x 120.1 cm (H)
SHIPPING WEIGHT	116.8 lb (53 kg)
WARRANTY	1-year limited



FEATURES

- Powered by a twin cylinder 2 HP (1491.4W) 120V AC brushless electric motor ¹
- Holds up to 20 gal (75.7 L) of compressed air at 150 PSI (10.3 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports ²
- 2 clear analog pressure gauges ³
- Regulator dial to control the amount of air pressure released at the hose outlets ⁴
- Ergonomic handle ⁵
- Ø8" (Ø20.3 cm) OD x 1.75" (4.4 cm) tires for easy mobility ⁶
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

