




CD-351 3HWBSEGEN-HWTB

HONDA GX390, 4000 PSI

POWERED by
HONDA



THE **BE**
COOL DRIVE FEATURE
DRAWS COOL AIR INTO PULLEY AND KEEPS
YOUR PUMP **25% COOLER**

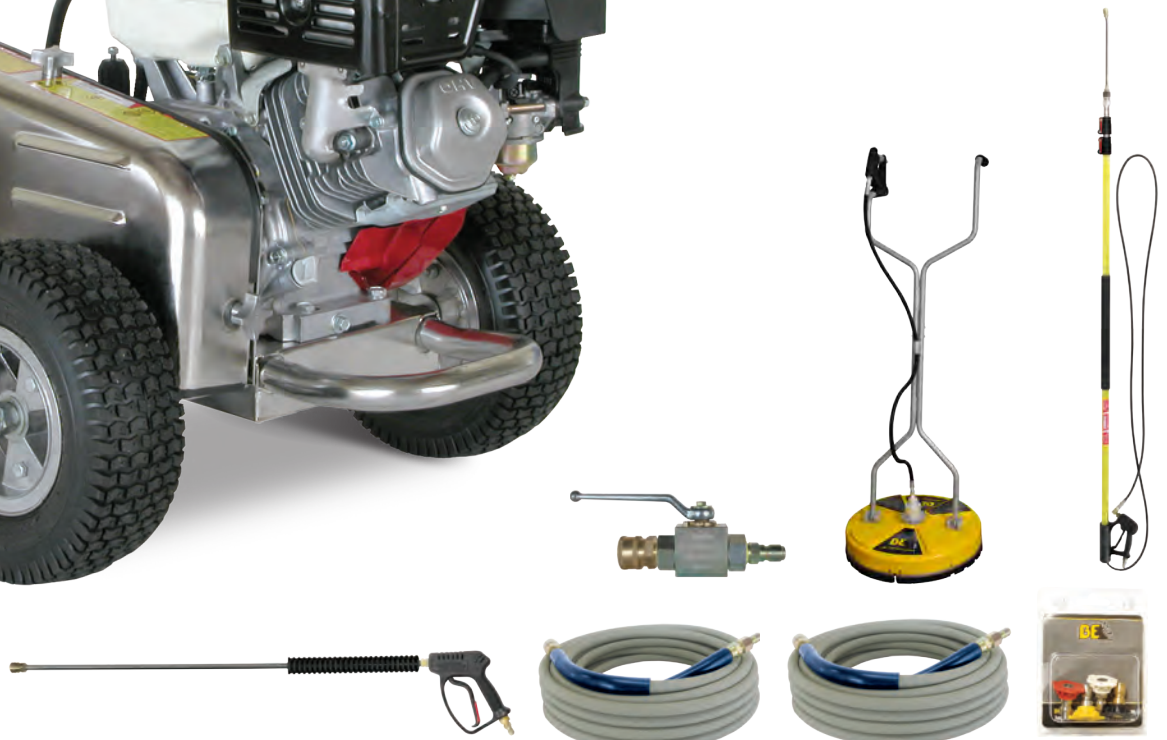

SPECIFICATIONS

STAINLESS STEEL FRAME

PART#	GPM	PSI	DISPLACEMENT	TRIPLEX PUMP	UNLOADER
CD-3513HWBSEGEN-HWTB	4.0	3500	389cc HONDA GX390	GENERAL TSS-1511	BLOCK MOUNT

ACCESSORIES INCLUDED

PART #	DESCRIPTION
2X 85.238.156	3/8" 50' GREY NON MARKING HOSE
85.205.026	36" GUN/WAND/COUPLINGS
85.210.040BEP	#4 QUICK CONNECT NOZZLES: 0°, 15°, 40°, SOAPER
85.205.026	WAND ASSEMBLY WITH GUN AND COUPLER
85.206.018L	18" STANDARD FIBERGLASS TELESCOPING WAND
85.300.044	BALL VALVE KIT
85.403.007	20" WHIRL-A-WAY

PUMP OPTIONS

GENERAL TSS-1511
85.139.005B
REPLACEMENT UNLOADER
85.300.032



SHIPPING

212
lbs

27 IN

28 IN
34 IN

4
UNITS PER
PALLET

ADDITIONAL INFO

- LOW PRESSURE CHEMICAL INJECTOR
- STAINLESS STEEL FRAME **PART# 85.600.081**
- 13" PNEUMATIC TIRES **PART# 85.660.020**
- ENGINE OIL 10W 30 **PART# 85.490.002**
- PUMP OIL 30W NON DETERGENT **PART# 85.490.000**
- 1" KEYED SHAFT

ENGINE
WARRANTY



PUMP
WARRANTY

