


COMMERCIAL PRESSURE WASHER FEATURES

DXPW3000E



GUARANTEED TOUGH[®].

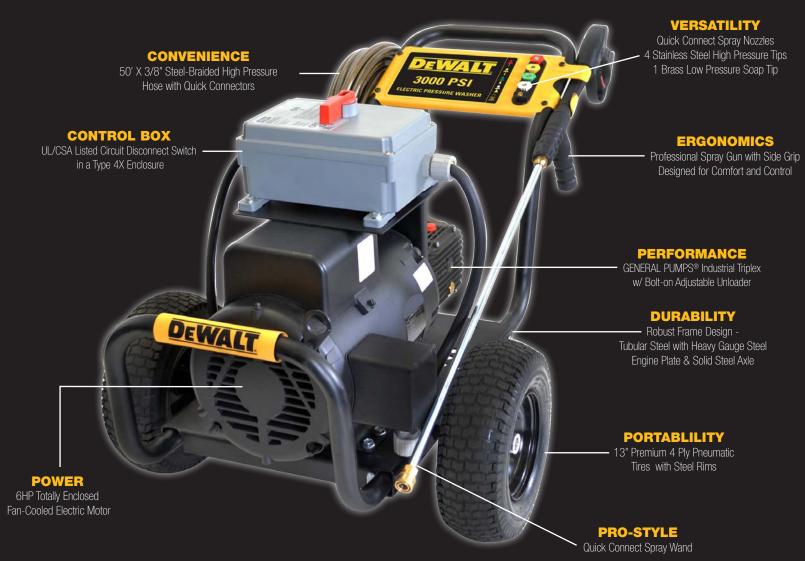

COMMERCIAL PRESSURE WASHERS

SPECIFICATIONS

Cold Water Commercial Electric Pressure Washers

	DXPW1200E	DXPW2000E	DXPW2500E	DXPW3000E
Water Pressure	1200 PSI	2000 PSI	2500 PSI	3000 PSI
Flow Rate	2.0 GPM	3.0 GPM	3.5 GPM	4.0 GPM
Motor	1.5HP Totally Enclosed Fan-Cooled Electric Motor	4HP Totally Enclosed Fan-Cooled Electric Motor	6HP Totally Enclosed Fan-Cooled Electric Motor	8HP Totally Enclosed Fan-Cooled Electric Motor
Rated Voltage	120V Single Phase	208/230V Single Phase	208/230V Single Phase	208/230V Single Phase
Power Cord/Plug	35ft with GFCI / NEMA 5-15P	35ft with GFCI / NEMA 6-30P	35ft with GFCI / NEMA 6-30P	35ft with GFCI / NEMA 6-50P
Control Box	Integrated	UL/CSA Listed Circuit Disconnect Switch in a Type 4X Enclosure	UL/CSA Listed Circuit Disconnect Switch in a Type 4X Enclosure	UL/CSA Listed Circuit Disconnect Switch in a Type 4X Enclosure
Pump	GENERAL PUMPS® Industrial Triplex w/ Adjustable Unloader	GENERAL PUMPS® Industrial Triplex w/ Bolt-on Adjustable Unloader	GENERAL PUMPS® Industrial Triplex w/ Bolt-on Adjustable Unloader	GENERAL PUMPS® Industrial Triplex w/ Bolt-on Adjustable Unloader
Frame	Welded Construction- Tubular Steel with Heavy Gauge Steel Engine Plate & Solid Steel Axle	Welded Construction- Tubular Steel with Heavy Gauge Steel Engine Plate & Solid Steel Axle	Tubular Steel with Heavy Gauge Steel Engine Plate & Solid Steel Axle	Tubular Steel with Heavy Gauge Steel Engine Plate Solid Steel Axle
High Pressure Hose	25' x 1/4" Steel-Braided	50' x 3/8" Steel-Braided	50' x 3/8" Steel-Braided	50' x 3/8" Steel-Braided
Spray System	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap
Detergent Application	Injection System	Adjustable Injection System	Adjustable Injection System	Adjustable Injection System
Safety Features	Thermal Safety Valve, GFCI Safety Protection	Thermal and Over Pressurization Safety Valves, GFCI Safety Protection	Thermal and Over Pressurization Safety Valves, GFCI Safety Protection	Thermal and Over Pressurization Safety Valves, GFCI Safety Protection





GUARANTEED TOUGH[®].

DEWALT[®], GUARANTEED TOUGH[®], and the yellow and black color scheme are trademarks of the DEWALT[®] Industrial Tool Co. Copyright © 2015 Manufactured under license for DEWALT[®] by: FNA Group, Inc, Elk Grove Village, IL 60007