

 **HOT 2 GO[®]**
POWER WASHER



Manufactured in the USA by

 **HYDRO TEK**

February 2015

HOT POWER WASHER: ELECTRIC POWERED, DIESEL HEATED



The **HV Series** combines the cleaning power of high pressure with the grease cutting effectiveness of hot water, wet steam, or downstream soap. This machine offers great portability with the included wheel kit. Choose either the 115V/15amp or 208/230V/24amp power supply, includes a 35' GFI protected cord. Water output up to 250°F with 8 gallon all-day diesel tank for the diesel fired burner system. Includes trigger gun, 36" spray wand, 50' hose, quick connect nozzles, adjustable thermostat, pressure relief valve, and safety burst disc. This compact pressure washer is built to last with an industrial duty motor and a triplex, ceramic plunger pump. These heavy duty pumps outperform axial and wobble plate pumps and are designed for a long life of industrial duty use. Dimensions: 44"Lx28"Wx45"H

Model HV13002E1H
1300psi @ 1.75gpm,
(90bar, 7liters)
1750 Low RPM Motor
1.5hp, 115v, 15amp
Exceptional 150°F heat rise
Use anywhere – plugs into
any standard outlet

15amp



Standard Features:

- High efficiency heating system will quickly heat water up to 250°F wet steam
- Dual voltage on the 208/230v model allows you to operate with either 208v or 230v
- Stainless steel insulated coil enclosure
- Wheel kit and integrated hose/ electrical cord storage hooks, downstream soap injection with 2½ gallon soap jug

Model HV22004E2H
2200psi @ 3.5gpm,
(152bar, 13liters)
5hp, 208/230v, 1ph, 24amp
(requires electrical plug to fit
your receptacle)



POWER
HOT 2 GO
WASHER

WWW.HOT2GO.COM

1-909-799-9222

HOT POWER WASHER: GAS POWERED, DIESEL HEATED

The **SH Series** is a portable high power washer with a compact design, ideal for use where electric power is not available. An industrial duty engine provides power to the triplex, ceramic plunger, direct-drive pump and thermostatically controlled 12VDC burner. The stainless wrapped 1/2" SCH 80 steel coil heats water up to 250°F. You will experience extended burner run time with the large 8 gallon diesel tank. Its rugged powder coated frame has a lifting point, integrated hose hooks, wand holder, and 4 large wheels are also included for portability. *Requires Group 24 550CCA battery, not included.* Dimensions: 44"Lx28"Wx45"H

Model SH27003VH
2700psi @ 2.5gpm
(186bar, 9liters)
205cc Vanguard engine
Electric start

Model SH30003HH
3000psi @ 3.0gpm
(207bar, 11liters)
270cc Honda engine
Pull start

Model SH35003VH
3500psi @ 3.0gpm
(241bar, 11liters)
305cc Vanguard engine
Pull start

Model SH40004HH
4000psi @ 3.5gpm
(276bar, 13liters)
389cc Honda engine
Electric start



Standard Features:

- High temperature adjustable thermostat, up to 250°F wet steam
- Stainless steel insulated coil enclosure, heavy duty spray wand, gun, quick connect nozzles, 50' high pressure hose
- Handles and large tires for portability, plus integrated wand and hose storage

Options...

Downstream injection kit (#AC340), hour meter (AM512)



POWER



WASHER

WWW.HOT2GO.COM

1-909-799-9222

HOT WATER WASH SKID: ENGINE POWERED, DIESEL HEATED

The **SK Series** is a truly versatile machine. It can be trailer or truck mounted to work for you, right where you need it. An efficient industrial duty electric-start Vanguard or Honda engine provides power to the pump and 12V diesel burner so no electrical supply is needed. The large, high capacity, ½" SCH 80 coil is stainless steel wrapped and heats the water up to 250°F. You will experience extended run times with the large 8 gallon gas and diesel tanks*. Industrial rated, direct or belt-drive triplex plunger pumps for superior performance and longevity. The unloader is remote mounted allowing for easy maintenance and has an external bypass loop to keep the pump running cool. Burst disc and pressure relief valve for operator safety. A full cage frame with lifting eye protects your machine from damage.

Requires Group 24 550 CCA battery, not included.

Dimensions: 43"L x 27"W x 45"H



Model SK40004HH

Direct Drive Pump

4000psi @ 3.5gpm

(276bar, 13liters)

389cc Honda engine, electric start

Model SK30005VH

Belt Drive Pump

3000psi @ 5.0gpm

(207bar, 19liters)

479cc Vanguard engine, electric start

Model SK40005VH

Belt Drive Pump

4000psi @ 4.8gpm

(276bar, 18liters)

570cc Vanguard engine, electric start

*SK40004HH has a 1.6 gallon gasoline tank mounted on the engine and dual 8 gallon diesel fuel tanks

Standard Features:

- Commercial/Industrial, electric start gasoline engine (*diesel engine option available*)
- Triplex, ceramic plunger, direct or belt drive pumps
- Adjustable thermostat up to 250°F
- Heavy duty, insulated spray wand, trigger gun, quick connect nozzles and 50' hose

Options...

Downstream injection kit (#AC340), Hour meter (AM512), 200 gal Transport trailer, 200 gallon Tank skid/reels, Tow & Stow™ tank skid transporter



POWER



WASHER

WWW.HOT2GO.COM

1-909-799-9222

POWER WASHER TRAILERS AND WATER TANK PACKAGES

Choose the tank configuration that best suits your needs. All systems include the following features:

- Hot/Cold/Steam power washer with all features of SK Series washers
- 200 gallon capacity tank with inlet water filter strainer to protect pump from debris
- Stainless steel inlet & high pressure hose reels, includes 50' high pressure & 100' inlet hose



Single axle trailer:

- 3700 # rated torsion axles for smooth ride
- Flip up locking wheeled jack
- Heavy duty steel fenders and recessed lights

Model: **T185SKH / SK40004HH**

4000psi @ 3.5gpm, 389cc Honda engine

Model: **T185SKH / SK30005VH**

3000psi @ 5.0gpm, 479cc Vanguard engine

Model: **T185SKH / SK40005VH**

4000psi @ 4.8gpm, 570cc Vanguard engine

Tank skid package easily mounts into your truck or existing flatbed trailer with 4 bolts

Model: **T185TWH / SK40004HH**

4000psi @ 3.5gpm, 389cc Honda engine

Model: **T185TWH / SK30005VH**

3000psi @ 5.0gpm, 479cc Vanguard engine

Model: **T185TWH / SK40005VH**

4000psi @ 4.8gpm, 570cc Vanguard engine



74"l x 48"w x 48"h



Tow & Stow Wash Cart is ideal for schools, malls, shopping centers, hospitals and other large facilities

- Flip up handle automatically locks the wheels for safe and compact storage
- Pivoting front axle allows for easy maneuverability
- No weight on the tongue allows it to be pulled with a Utility Vehicle
- Transporter is intended to be used and stored on site, not for public roads.

Model: **TSKDT / T185TWH / SK40004HH**

4000psi @ 3.5gpm, 389cc Honda engine

Model: **TSKDT / T185TWH / SK30005VH**

3000psi @ 5.0gpm, 479cc Vanguard engine

Model: **TSKDT / T185TWH / SK40005VH**

4000psi @ 4.8gpm, 570cc Vanguard engine

POWER



WASHER

WWW.HOT2GO.COM

1-909-799-9222

POWER WASHING ACCESSORIES



Connect a **Hydro Twister®** to your pressure washer for: sidewalks, restroom floors, drive-thrus, school yards, food processing floors, sport courts, loading docks, stadiums and other flat surfaces.

It will clean more consistently than an operator with a wand, with less fatigue, 10-20 times faster, and can be used with hot water for stubborn grease, grime, or for sanitizing. Connection to your pressure washer gun is quick and easy with the 22mm coupler.

Standard Features:

- Use with hot water up to 210°F
- Low profile deck to fit under benches & machinery

Convertible Surface Cleaner / Undercarriage Washer

The 3-in-1 pressure washer accessory is handy for cleaning tile, decks and roofs and is ideal for lower output power washers. The seamless composite deck is lightweight and will not become brittle with age and the casters can be removed

for operation on uneven surfaces and roofs. Simply flip the deck over and use as an undercarriage washer. Max. rating 4000psi, 4gpm. (Gun not included)

- 20" deck, comes with 2) #2.0 nozzles. Part# ANT1NH




Rotary Surface Cleaner

Take one for a spin! These rustproof surface cleaners have all stainless construction to outlast all others in even the harshest of washing conditions. The four casters swivel for free movement while cleaning. The heavy duty stainless skirt protects the spray arm from damage. The handle can be positioned for either right or left handed operation. Connection to the gun is quick and easy with the 22MM twist coupler. Two deck sizes available. Max. rating 5000psi, 6gpm.

- 28" deck, comes with 2) #2.7 nozzles. Part# ANT2H
- 20" deck, comes with 2) #2.0 nozzles. Part# ANT1H

For the optimal cleaning results, ask your dealer to match your surface cleaner nozzle size to the pressure and flow of your power washer.

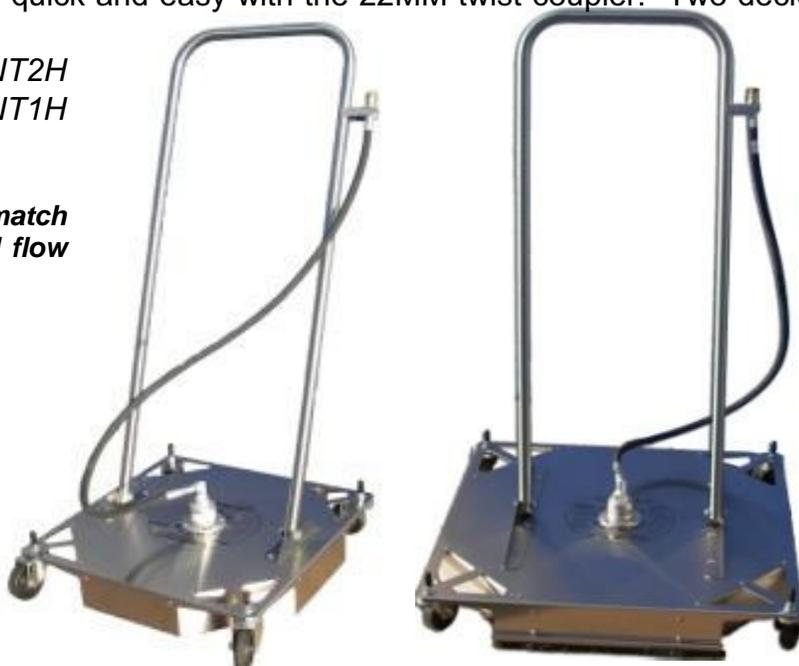

POWER

HOT 2 GO®

WASHER

WWW.HOT2GO.COM

1-909-799-9222

POWER WASHING ACCESSORIES

A rustproof, chip proof, **stainless steel hose reel** for about the same cost as a painted one. These reels are built to stand up to years of use and the mounting foot allows you to mount it almost anywhere. Fluid path and mounting foot are zinc plated steel. Reels are shipped quick, fully assembled, and are proudly **MADE IN THE USA**.



Part#	Temp.	Capacity	psi	Type
AR100	250°F	150' of 3/8"	3500	narrow-base mount, friction brake
AR150	400°F	150' of 3/8"	5000	narrow-base mount, friction brake
AR110	250°F	250' of 3/8"	3500	large-base mount, pop-pin brake
AR151	400°F	250' of 3/8"	5000	large-base mount, pop-pin brake
AR152	cold	150' of 5/8"	Inlet	large-base mount, pop-pin brake
AR188	400°F	100' of 3/8"	5000	wall mount to 16" stud width

Pivoting hose reel: This stainless pivoting hose reel has a capacity of 150' x 3/8" high pressure hose, 5000psi, 400°F and is designed to mount on tubing with the enclosed clamp, or can be mounted on a wall. The reel has a friction brake for adjusting the drag depending on your job. It will pivot a full 360 degrees or you can slide the pin to lock the rotation where needed. *Part# AR425*

Stacking Hose Reels: Two stainless hose reels attached to a sturdy powder coated steel frame that conveniently bolts down to any flat surface. (Ships in two boxes).

Two configurations to choose from:

Reel capacity of 250' x 3/8", 5000psi, 400° paired with a 150' inlet reel. *Part# AR325*

Reel capacity of 250' x 3/8", 5000psi, 400° paired with another of the same. *Part# AR326*



Hot Link Hot Water Generator

Would you like your cold water pressure washer to be capable of spraying hot water? Simply connect the Hot Link to your existing cold water pressure washer (up to 4350psi /300bar, up to 5gpm / 19liters) with the included 4' connection hose and you have the hot water you need to wash away grease and grime efficiently. The Hot Link uses a diesel fired burner and schedule 80 steel pipe coil with ceramic insulation to efficiently provide up to 200°F water. The Hot link is compact and rugged with a powder coated steel base/frame and stainless coil enclosure.

Dimensions: 29"Lx22"Wx22"H



CPHL5DCH: 12v powered, wire to the battery on your pressure washer (minimum 14amp charging system)

CPHL5E1H: 115v, 1ph, 15 amp, plug into a wall outlet or 2000w generator



WATER / FLOOD RECOVERY & EVACUATION

Ideal for interior & exterior facilities maintenance contractors needing to collect wash water, or restoration contractors needing to pick up large volumes of water after a fire or flood.



Two optional wheel kits to choose from if you want to add portability.

Capture and transfer up to 3000 gallons of water per hour with the **RPV Hydro Vacuum®** water & flood recovery vacuum systems. They feature a powerful, industrial 2-stage vacuum motor and a heavy duty stainless steel water pump to transfer wastewater while vacuuming continues... no need to stop and dump the collection tank. Dimensions: 17"W x 38"H, 56 pounds

Standard Features:

- Transfers wastewater up to 100' away
- Easy to use, compact design – Easy to maintain

Options...

Install optional dry work filter (#VFB3) for use as a high powered shop/detail vacuum. vacuum hose (#DHV50), scupper (#ATP75), Caster wheel kit option (#AHS07), Dolly style wheel kit (#AHS06)

Model RPV30E1H: 30gpm, 115v, 15amp or 3500w generator

Model RPV50E1H: 50gpm, 115v, 20amp or 5500w generator

*Specs calculated using 25' of 2" vacuum hose & 50' of 2" discharge hose.

The **RGV** is a powerful water capture and transfer system that has a gas engine driven blower and will pick up water from over 350' away.

The unique polyethylene separation tanks are non-corrosive, weigh less than others, and have full access to the inside for periodic maintenance with a quick lift-off lid. Open the large 1½" valve to dump sludge/solids that collect at the bottom. Each separation tank has an automatic transfer system which pumps the water out to your bulk tank, landscape, or sanitary sewer where permitted. A debris filter and air filter protect both the transfer pump and blower from debris.



Standard Features:

- Vacuum and pump out simultaneously and automatically, no loss of suction or lost time dumping tanks
- Recovers up to 25gpm, use up to 350' total hose length – Use with one or two pickup devices
- Light, non-corrosive vacuum separation tanks
- Lift-out basket strainer collects large debris and quickly lifts out for dumping.
- 627cc Vanguard engine and 8 gallon fuel tank are integrated into a compact 48" chassis

Model RGV40H: Requires dual 115v 15amp plug or 2000w generator. Requires Group 24, minimum 650cca battery

POWER



WASHER

Requires 2" diameter vacuum hose and 2" discharge hose. For use with cold water or hot water up to 200°F. Consistent air introduction at the pickup is needed to prevent hydraulicing.

Increase your efficiency with optional vacuum tools such as a Hydro Twister® recovery surface cleaner, carpet wand, vacuum scupper, or containment berms.

WWW.HOT2GO.COM

1-909-799-9222