

Hurricane Pro

Technical Data

FIESSUIE
Temperature
RPM
Housing
Water connection
Nozzle connection
Throughput medium

4000psi (27.5MPa) 250°F max. 2000 rpm ø20.5″ 3/8″NPT-F 2x 1/8″NPT-F water (pH 3-12)

Datum / Date: 17.12.2019 | Änderungen vorbehalten | Subjects to change without notice



Hurricane Pro

Indication: (original language German)

- Read all instructions, check overall conditions and safety requirements before initial operation of the product.
- Our product should only be installed by experienced users of high pressure equipment.
- Safety regulations and guidelines (Accident Prevention Rules) from the manufacturer of your high pressure cleaner are applicable.
- Nozzle installation according to Nozzle manufacturer.
- Do not run the product if the rotor-arm is out of balance or bent, damage to the swivel will result.
- No modifications to the product are permitted.


🔨 Caution:

- Always use protection gear when using products connected to high pressure.
- Before any maintenance or nozzle-change, turn off the high pressure water supply, e.g.: turn off and secure the power switch.
- After turning off the system, allow all selfpropelled equipment to come to a complete stop before handling. Risk of injury due the rotor-arm.
- Do not lift up the product while operating.

🔨 Warning:

- Never direct any high pressure water-jet at humans, animals or electric installations.
- Do not touch the rotor-arm during operation. Risk of injury.
- After pivoting, the wash unit must be secured to avoid unintended swing back.



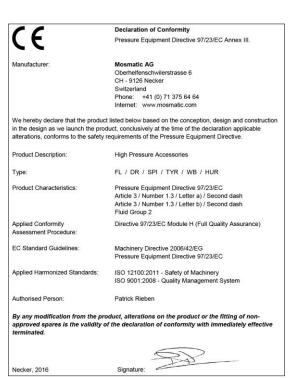


Datum / Date: 17.12.2019 | Änderungen vorbehalten | Subjects to change without notice

TD - 80617 A HURp-520



Hurricane Pro

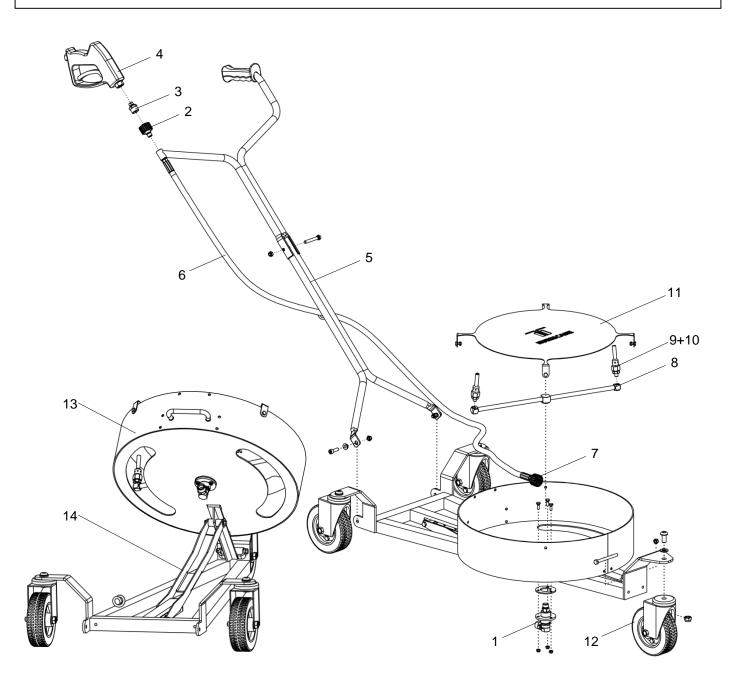

Pos.	Art. Nr.	Description
1	58.553	Swivel-90° (DYF)
2	50.903	Quick-Connect (M22x1.5-F / G1/4"M)
3	51.275	Adapter (M22x1.5-M / G1/4"M)
4	29.081	HP-gun (5000psi)
5	904.987	Fork cpl. without hose
6	904.019	HP-hose (2xG1/4″kM)
7	50.155	Quick-connect (M22x1.5-F / G1/4"F)
8	82.891	Rotor arm (ø18.5″)
9	14.902	Stabilizer nozzle (1/8"NPT-M)
10	0003EG	Insert nozzle
11	80.621	Protective plate (ø20.5")
12	80.9005	Caster (ø6") replacement set
13	80.9010	Housing replacement set
14	80.9006	Adjustment arm replacement set

Datum / Date: 17.12.2019 | Änderungen vorbehalten | Subjects to change without notice