




TELESCOPING LANCE BELT ASSEMBLY INSTRUCTION



- Insert the strap along the lance in the position chosen by the user. Pass the strap through the buckle from below, then exit the strap through the buckle at the opposite side, fasten the strap.
- Return the strap across the buckle and insert the strap again for added security.
- Position the belt around the waist and fasten it with the clamp in front of the body. Then fasten the strap tightly.
- Pull the shoulder belt across shoulder, buckle into waist belt and fasten tightly.
- Insert previously attached lance belt into waist belt.
- Following the above instructions you will be able to safely operate the telescoping lance.

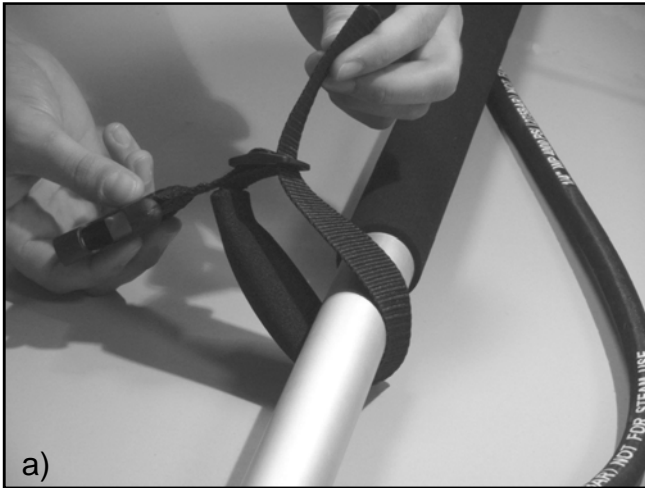

WARNING: ELECTRICAL SHOCK RISK!

This product is not to be used near power lines; if necessary keep at least 16 feet (5 meters) from them. Do not spray at electrical wiring.