

### DESCRIPTION


These new pumps feature a new rod design, large side cover sight glass, ceramic plungers, high quality high-pressure seals, new, low-pressure seal with scraper (patented), two piece plunger guides, forged brass high efficiency head design and new styling. Flows to 5.5 GPM, Pressure to 4000 PSI, RPM 1450, 1750 & 3400. The pumps come in three drive types: 24mm solid, 1" and 1-1/8" hollow shaft. Drivers: electric, gasoline, hydraulic or diesel.



### SPECIFICATIONS

MAX GPM .....	4.0	MAX LMP .....	15.1
MAX PSI .....	4000	MAX BAR .....	275
POWER EBHP .....	9.9	BORE DIA. MM .....	15
STROKE MM .....	9.2	WEIGHT LBS .....	18
MAX TEMP .....	140°	OIL CAPACITY .....	13.35oz
INLET THREAD .....	1/2" F	DISCHARGE THREAD .....	3/8" F

### DIMENSIONS

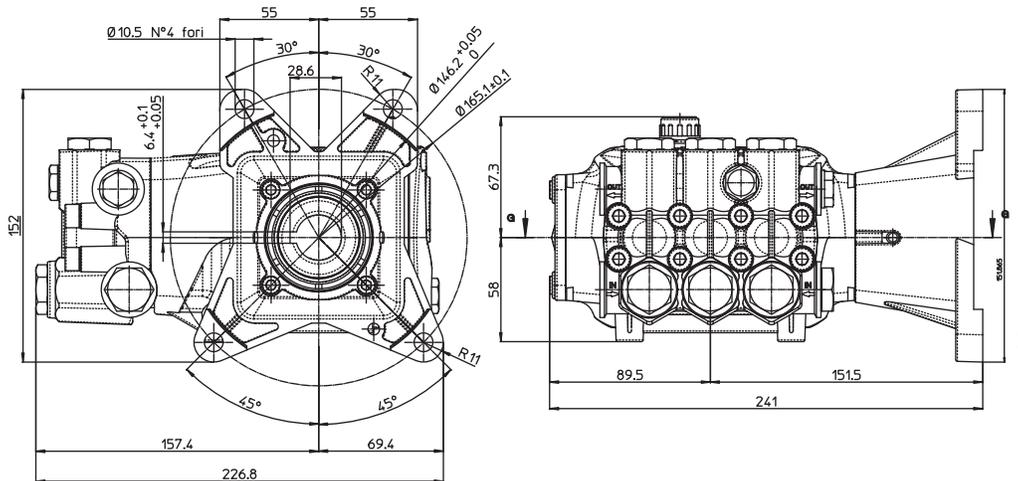

Measurements are - mm

### FEATURING

**Manifold:** High strength forged brass for long term use.

**Bolts:** Eight 6mm.

**Plungers:** NEW Ceramic Plungers, thicker wall to help prevent thermal shock.

**Valves:** Stainless Steel, valve seat o-ring is side mounted.

**Seals:** High quality high pressure seals. NEW low-pressure seal with a built in scraper.

**Piston Guides:** Two piece piston guides.

**Drive End:** NEW connecting rod with 12% more load surface. Large side cover sight glass, oversized bearing. Rear cover oil drain.

**Crankshaft:** Forged, precision ground.