

POWER LIKE NO OTHER


DIRECT DRIVE | GAS ENGINE | DIESEL/ KEROSENE BURNER



HEATING COIL 1/2" Heavy-duty schedule 80 Carbon Steel Cold-rolled pipe.

Rated for high pressure, 128' length for maximum heat rise and proper heat production.

Direct Drive Triplex AR Pump Adjustable thermostat up to 93°C/200°F

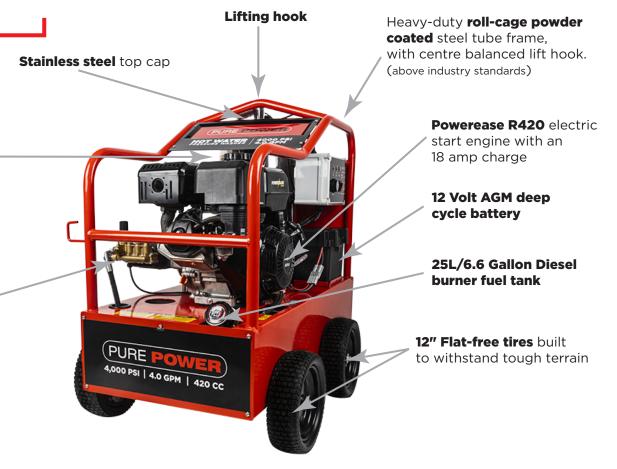

Belt guard



WARRANTY

| ENGINE | 5 YEARS* |
|--------|----------|
| PUMP | 2 YEARS |
| COIL | 3 YEARS |

MODEL # PPHW4015RA

UNIT SIZE

LxWxH: 43" X 30" X 44" WEIGHT: 430 LBS

SHIPPING SIZE LxWxH: 45" X 33" X 48"



*ENGINE COMES WITH A DEFAULT 2 YEAR WARRANTY. REGISTER YOUR UNIT TO UPGRADE IT TO 5 YEARS.

| MODEL | GPM | PSI | сс | ENGINE | BTU/HR | PUMP MODEL | DRIVE | BURNER FUEL | BATTERY INCLUDED | ACCESSORIES INCLUDED | UNIT WT (lbs) |
|------------|-----|-------|-----|-------------------|---------|------------|-----------------|---------------------|---------------------|-------------------------|------------------|
| PPHW4015RA | 4 | 4,000 | 420 | POWEREASE R420 | 246,000 | AR RSV4G40 | DIRECT DRIVE | DIESEL/ KEROSENE | YES | HOSE, WAND, NOZZLES | 430 |

PURE POWER

4,000 PSI - 4.0 GPM HOT WATER PRESSURE WASHER WITH 420CC POWEREASE ENGINE AND AR TRIPLEX PUMP

MODEL: PPHW4015RA

- **High quality Powerease R420** with electric start drives the pump. A deep cycle battery is included in a marine sealed box.
- **Belt drive** system drives the fuel pump and blower, extending their respective lifespans.
- **Direct Drive industrial grade AR triplex** pump featuring reinforced body, forged brass manifold, solid ceramic plungers, stainless steel check valves and thermal release valve.
- **Heating coil** is ignited by a 12V burner that uses diesel or kerosene as fuel.
- **The burner** can be turned off and controlled with the adjustable thermostat that can be set up to 93°/200°F.
- **Powder coated steel frame** with a cage design protects the components while allowing easy access to use or maintain.
- A lift point is built into the frame to allow the use of a crane to lift it onto a truck or trailer.



| ENGINE | | BURNER | | UNIT SIZE | |
|---------------|------------------------------|-------------------|-----------------------|---------------|-----------------|
| MODEL: | POWEREASE R420 | THERMOSTAT: | ON/OFF AND ADJUSTABLE | LxWxH: | 43″ x 30″ x 44″ |
| TYPE: | AIR COOLED, 4-STROKE OHV | MAX HEAT: | 93°C / 200°F | WEIGHT: | 430 LBS |
| DISPLACEMENT: | 420CC | IGNITER: | 12V BURNER | | |
| FUEL TYPE: | 86 OCTANE, UP TO 10% ETHANOL | HEATING COIL: | SCHEDULE 80 STEEL | • | 1 mm |
| OIL TYPE: | SAE 10W30 | COIL TUBE LENGTH: | 128' LENGTH OF TUBING | | |
| | | FUEL CAPACITY: | 6.6 GALLON | 44" | |
| PUMP SPECS | | FUEL TYPE: | DIESEL OR KEROSENE | | |
| MODEL: | AR RSV4G40 | | | | |
| TYPE: | TRIPLEX | FRAME | | | |
| PART NUMBER: | 85.129.037B | MATERIAL: | POWDER COATED STEEL | | 43" |
| OIL TYPE: | 30W NON-DETERGENT | | | 30" 💙 | - |
| SOAP SYSTEM: | ADJUSTABLE INJECTOR | SHIPPING SIZE | | | |
| | | LxWxH: | 45" x 33" x 48" | WARRANTY | |
| UNLOADER | | | | ENGINE: | 5 YEARS* |
| TYPE: | BUILT-IN | | | PUMP: | 2 YEARS |
| | | | | HEATING COIL: | 3 YEARS |
| | | | | UPC: | 777987363229 |